



Date: March 2023

Deleted: 2

# Command and Control Interface for Navigation (C2INav)

RTF-1 for Version 1.2

Deleted: 1

OMG Document Number: [dtc/2023-03-09](#)

Deleted: 2

Normative reference: <http://www.omg.org/spec/C2INAV/1.2/>

Deleted: 3

Machine readable file(s): <http://www.omg.org/C2INAV/20230201>:

Deleted: 1

- <https://www.omg.org/spec/C2INAV/20220201/c2inavgraphqlschema.graphqls>
- <https://www.omg.org/spec/C2INAV/20220201/c2inav>
- [https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain.idl)
- [https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Accuracy.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Accuracy.idl)
- [https://www.omg.org/spec/C2INAV/20230201/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Attitude.idl](https://www.omg.org/spec/C2INAV/20230201/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Attitude.idl)
- [https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Attitude\\_Offset\\_Report.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Attitude_Offset_Report.idl)
- [https://www.omg.org/spec/C2INAV/20230201/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Attitude\\_Ext.idl](https://www.omg.org/spec/C2INAV/20230201/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Attitude_Ext.idl)
- [https://www.omg.org/spec/C2INAV/20230201/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Depth.idl](https://www.omg.org/spec/C2INAV/20230201/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Depth.idl)
- [https://www.omg.org/spec/C2INAV/20230201/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Position.idl](https://www.omg.org/spec/C2INAV/20230201/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Position.idl)
- [https://www.omg.org/spec/C2INAV/20230201/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Position\\_Ext.idl](https://www.omg.org/spec/C2INAV/20230201/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Position_Ext.idl)
- [https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Reporting.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Reporting.idl)
- [https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Reporting\\_Navigation\\_Report.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Reporting_Navigation_Report.idl)

Deleted: 1

Deleted: 1

Deleted: 2

[https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Reporting\\_Ext.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Reporting_Ext.idl)  
[https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Domain\\_Model\\_Navigation\\_Domain\\_Navigation\\_Domain\\_Requests.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Domain_Model_Navigation_Domain_Navigation_Domain_Requests.idl)  
[https://www.omg.org/spec/C2INAV/20200501/IDL/org\\_omg\\_c4i\\_Service\\_Model\\_Navigation\\_Services.idl](https://www.omg.org/spec/C2INAV/20200501/IDL/org_omg_c4i_Service_Model_Navigation_Services.idl)

**Deleted: Normative:** [http://www.omg.org/spec/C2INAV/20200501/C2INav\\_Model\\_XML.xml](http://www.omg.org/spec/C2INAV/20200501/C2INav_Model_XML.xml)  
[http://www.omg.org/spec/C2INAV/20220201/C2INav\\_GraphQL\\_Schemas.zip](http://www.omg.org/spec/C2INAV/20220201/C2INav_GraphQL_Schemas.zip)

Deleted: 1

Command and Control Interface for Navigation (C2INav), v1.2

## USE OF SPECIFICATION - TERMS, CONDITIONS & NOTICES

The material in this document details an Object Management Group specification in accordance with the terms, conditions and notices set forth below. This document does not represent a commitment to implement any portion of this specification in any company's products. The information contained in this document is subject to change without notice.

## LICENSES

The companies listed above have granted to the Object Management Group, Inc. (OMG) a nonexclusive, royalty-free, paid up, worldwide license to copy and distribute this document and to modify this document and distribute copies of the modified version. Each of the copyright holders listed above has agreed that no person shall be deemed to have infringed the copyright in the included material of any such copyright holder by reason of having used the specification set forth herein or having conformed any computer software to the specification.

Subject to all of the terms and conditions below, the owners of the copyright in this specification hereby grant you a fully-paid up, non-exclusive, nontransferable, perpetual, worldwide license (without the right to sublicense), to use this specification to create and distribute software and special purpose specifications that are based upon this specification, and to use, copy, and distribute this specification as provided under the Copyright Act; provided that: (1) both the copyright notice identified above and this permission notice appear on any copies of this specification; (2) the use of the specifications is for informational purposes and will not be copied or posted on any network computer or broadcast in any media and will not be otherwise resold or transferred for commercial purposes; and (3) no modifications are made to this specification. This limited permission automatically terminates without notice if you breach any of these terms or conditions. Upon termination, you will destroy immediately any copies of the specifications in your possession or control.

## PATENTS

The attention of adopters is directed to the possibility that compliance with or adoption of OMG specifications may require use of an invention covered by patent rights. OMG shall not be responsible for identifying patents for which a license may be required by any OMG specification, or for conducting legal inquiries into the legal validity or scope of those patents that are brought to its attention. OMG specifications are prospective and advisory only. Prospective users are responsible for protecting themselves against liability for infringement of patents.

## GENERAL USE RESTRICTIONS

Any unauthorized use of this specification may violate copyright laws, trademark laws, and communications regulations and statutes. This document contains information which is protected by copyright. All Rights Reserved. No part of this work covered by copyright herein may be reproduced or used in any form or by any means--graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems--without permission of the copyright owner.

## DISCLAIMER OF WARRANTY

WHILE THIS PUBLICATION IS BELIEVED TO BE ACCURATE, IT IS PROVIDED "AS IS" AND MAY CONTAIN ERRORS OR MISPRINTS. THE OBJECT MANAGEMENT GROUP AND THE COMPANIES LISTED ABOVE MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS PUBLICATION, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF TITLE OR OWNERSHIP, IMPLIED WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR USE. IN NO EVENT SHALL THE OBJECT MANAGEMENT GROUP OR ANY OF THE COMPANIES LISTED ABOVE BE LIABLE FOR ERRORS CONTAINED HEREIN OR FOR DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL, RELIANCE OR COVER DAMAGES, INCLUDING LOSS OF PROFITS, REVENUE, DATA OR USE, INCURRED BY ANY USER OR ANY THIRD PARTY IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS MATERIAL, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The entire risk as to the quality and performance of software developed using this specification is borne by you. This disclaimer of warranty constitutes an essential part of the license granted to you to use this specification.

## RESTRICTED RIGHTS LEGEND

Use, duplication or disclosure by the U.S. Government is subject to the restrictions set forth in subparagraph (c) (1) (ii) of The Rights in Technical Data and Computer Software Clause at DFARS 252.227-7013 or in subparagraph (c)(1) and (2) of the Commercial Computer Software - Restricted Rights clauses at 48 C.F.R. 52.227-19 or as specified in 48 C.F.R. 227-7202-2 of the DoD F.A.R. Supplement and its successors, or as specified in 48 C.F.R. 12.212 of the Federal Acquisition Regulations and its successors, as applicable. The specification copyright owners are as indicated above and may be contacted through the Object Management Group, 109 Highland Avenue, Needham, MA 02494, U.S.A.

## TRADEMARKS

CORBA®, CORBA logos®, FIBO®, Financial Industry Business Ontology®, FINANCIAL INSTRUMENT GLOBAL IDENTIFIER®, IIOP®, IMM®, Model Driven Architecture®, MDA®, Object Management Group®, OMG®, OMG Logo®, SoaML®, SOAML®, SysML®, UAF®, Unified Modeling Language®, UML®, UML Cube Logo®, VSIPL®, and XMI® are registered trademarks of the Object Management Group, Inc.

For a complete list of trademarks, see: [http://www.omg.org/legal/tm\\_list.htm](http://www.omg.org/legal/tm_list.htm). All other products or company names mentioned are used for identification purposes only, and may be trademarks of their respective owners.

## COMPLIANCE

The copyright holders listed above acknowledge that the Object Management Group (acting itself or through its designees) is and shall at all times be the sole entity that may authorize developers, suppliers and sellers of computer software to use certification marks, trademarks or other special designations to indicate compliance with these materials.

Software developed under the terms of this license may claim compliance or conformance with this specification if and only if the software compliance is of a nature fully matching the applicable compliance points as stated in the specification. Software developed only partially matching the applicable compliance points may claim only that the software was based on this specification, but may not claim compliance or conformance with this specification. In the event that testing suites are implemented or approved by Object Management Group, Inc., software developed using this specification may claim compliance or conformance with the specification only if the software satisfactorily completes the testing suites.

Deleted: 1

## OMG's Issue Reporting Procedure

All OMG specifications are subject to continuous review and improvement. As part of this process we encourage readers to report any ambiguities, inconsistencies, or inaccuracies they may find by completing the Issue Reporting Form listed on the main web page <http://www.omg.org>, under Documents, Report a Bug/Issue.

## Table of Contents

<b>0</b>	<b>Issues To Be Discussed</b>	<b>9</b>
0.1	Non-Function Quality of Service Requirements	9
0.2	Separation on a Shared Network	9
0.3	Configuration by a Client	9
0.4	Monotonic Data-streams	9
0.5	Security Protection from Cyber Threats	9
<b>1</b>	<b>Scope</b>	<b>9</b>
<b>2</b>	<b>Conformance</b>	<b>9</b>
<b>3</b>	<b>Normative References</b>	<b>9</b>
<b>4</b>	<b>Terms and Definitions</b>	<b>9</b>
<b>5</b>	<b>Symbols</b>	<b>11</b>
<b>6</b>	<b>Additional Information</b>	<b>11</b>
6.1	Acknowledgements	11
<b>7</b>	<b>Command and Control Interface for Navigation Systems</b>	<b>12</b>
7.1	Introduction	12
7.2	Navigation_Domain	12
7.2.1	accuracy_derivation_type	13
7.2.2	navigation_accuracy_type	13
7.2.3	navigation_derivation_kind_type	14
7.2.4	Attitude	14
7.2.4.1	attitude_rotation_accuracy_type	15
7.2.4.2	attitude_rotation_type	15
7.2.4.3	measurement_kind_type	16
7.2.4.4	offset_report_type	16
7.2.4.5	Attitude.Ext	17
7.2.4.5.1	attitude_rotation_rate_accuracy_type	17
7.2.4.5.2	attitude_rotation_rate_type	18
7.2.4.5.3	position_offset_accuracy_type	18
7.2.4.5.4	position_offset_type	19
7.2.4.5.5	velocity_offset_accuracy_type	19
7.2.4.5.6	velocity_offset_type	19
7.2.5	Depth	20
7.2.5.1	depth_coordinate_type	20
7.2.5.2	depth_report_type	21
7.2.6	Position	21
7.2.6.1	altitude_measurement_type	22
7.2.6.2	own_position_accuracy_type	23
7.2.6.3	own_position_type	23
7.2.6.4	own_velocity_accuracy_type	23
7.2.6.5	own_velocity_type	23
7.2.6.6	velocity_measurement_type	24

Deleted: 1

7.2.6.7	Position.Ext.....	24
7.2.6.7.1	own_acceleration_accuracy_type.....	25
7.2.6.7.2	own_acceleration_type.....	25
7.2.6.7.3	speed_rate_type.....	26
7.2.7	Reporting.....	26
7.2.7.1	navigation_report_kind_type.....	26
7.2.7.2	navigation_report_type.....	26
7.2.7.3	navigation_request_type.....	<b>Error! Bookmark not defined.</b>
7.2.7.4	Reporting.Ext.....	27
7.2.7.4.1	navigation_covariance_type.....	27
7.2.7.4.2	navigation_report_kind_sequence_type.....	28
<b>7.3</b>	<b>Navigation_Services.....</b>	<b>28</b>
7.3.1	Navigation_CMS.....	34
7.3.2	Navigation_Sub.....	34
<b>8</b>	<b>Domain Model Platform-Specific Models.....</b>	<b>36</b>
8.1	DDS PSM.....	36
8.2	GraphQL PSM.....	36
<b>9</b>	<b>Service Model Platform Specific Models.....</b>	<b>36</b>
9.1	DDS PSM.....	37
9.2	GraphQL PSM.....	37

Deleted: 1

## Preface

### OMG

Founded in 1989, the Object Management Group, Inc. (OMG) is an open membership, not-for-profit computer industry standards consortium that produces and maintains computer industry specifications for interoperable, portable, and reusable enterprise applications in distributed, heterogeneous environments. Membership includes Information Technology vendors, end users, government agencies, and academia.

OMG member companies write, adopt, and maintain its specifications following a mature, open process. OMG's specifications implement the Model Driven Architecture® (MDA®), maximizing ROI through a full-lifecycle approach to enterprise integration that covers multiple operating systems, programming languages, middleware and networking infrastructures, and software development environments. OMG's specifications include: UML® (Unified Modeling Language™); CORBA® (Common Object Request Broker Architecture); CWM™ (Common Warehouse Metamodel™); and industry-specific standards for dozens of vertical markets.

More information on the OMG is available at <http://www.omg.org/>.

### OMG Specifications

As noted, OMG specifications address middleware, modeling and vertical domain frameworks. All OMG As noted, OMG specifications address middleware, modeling and vertical domain frameworks. All OMG Specifications are available from the OMG website at:

<http://www.omg.org/spec>

All of OMG's formal specifications may be downloaded without charge from our website. (Products implementing OMG specifications are available from individual suppliers.) Copies of specifications, available in PostScript and PDF format, may be obtained from the Specifications Catalog cited above or by contacting the Object Management Group, Inc. at:

OMG Headquarters  
109 Highland Avenue  
Needham, MA 02494  
USA  
Tel: +1-781-444-0404  
Fax: +1-781-444-0320  
Email: [pubs@omg.org](mailto:pubs@omg.org)

Certain OMG specifications are also available as ISO standards. Please consult <http://www.iso.org>

### Typographical Conventions

The type styles shown below are used in this document to distinguish programming statements from ordinary English. However, these conventions are not used in tables or section headings where no distinction is necessary. Times/Times New Roman - 10 pt.: Standard body text

**Helvetica/Arial - 10 pt. Bold:** OMG Interface Definition Language (OMG IDL) and syntax elements.

**Courier/Courier New - 10 pt. Bold:** Programming language elements.

Helvetica/Arial - 10 pt: Exceptions



# 1 Scope

This specification defines the interface between a Navigation System and Command and Control (C2) functions. It is concerned with the transfer of information regarding the location, movement, orientation and local environment of the platform of which the Navigation System is a part to C2 functions.

# 2 Conformance

This specification defines conformance points to promote both applicability and interoperability. Services within the specification relating to control of the information reported and specialist parts of the data model are optional. The mandatory services within the interface relate to the transfer of basic information with the default behavior of the Navigation System.

**Table 2.1 - Conformance Points for C2INav**

Conformance Point	Data Model Packages	Service Methods	Rationale
Basic Reporting	Navigation Domain, Navigation Domain::Attitude, Navigation Domain::Position	write_rotational_attitude, write_position, write_velocity	Supports a system where the most commonly used attributes are reported with the Navigation System's default behavior without any C2 control
Reporting Control	(Basic Reporting plus) Navigation Domain::Reporting	(Basic Reporting plus) request_navigation_data	Supports a system where the C2 system can control the Navigation System's reporting of the most commonly used attributes
Specialist Data	All Packages	All Services	Supports the whole specification in the Navigation System's reporting of specialist data subject to control by the C2 System.

# 3 Normative References

The following normative documents contain provisions which, through reference in this text, constitute provisions of this specification. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply.

- OARIS(formal/2016-03-02)
- DDS (formal/2015-04-10)
- IDL (formal/2018/01/05)
- EVOT (formal/2008-08-01)
- Network Time Protocol (www.ntp.org)
- Precision Time Protocol (IEEE 1588 – http://www.ieee1588.com)

# 4 Terms and Definitions

**Deleted: Issues To Be Discussed¶ Non-Function Quality of Service Requirements¶**

a) Proposals shall discuss the non-functional, quality of service requirements typical in integration of navigation with C2 System systems, e.g. high levels of performance, latency and timing constraints, dependability and security.¶  
 Sensor Systems: accuracy and precision of attitude data is a major factor of the accuracy, precision and functional performance of the sensor in general. Also low latency is required for some types of sensor to accurately point the sensor or to steer its beam.¶  
 Effector Systems: dependability is required to mitigate the risks posed by systems designed to deliver an effect into the environment; also low latency and a predictive motion model is required to accurately deliver an effect from a platform experiencing translational and rotational acceleration in three dimensions.¶  
 Mission Critical Functions: require trusted information from an authenticated source.¶  
 The proposed C2INav data model scales to describe the information required for a broad range of mission critical applications – for instance the inclusion of time derivatives, accuracies and covariance at scalable compliance levels. The DDS PSM supports the latency, dependability, trust and authentication required for these critical functions through Quality of Service settings and the DDS Security standard.¶  
**Separation on a Shared Network¶**  
 b) Discuss how the C2INAV can ensure data separation on a shared network (e.g. through the use of an access key associated with the data) from the Information Assurance point of view.¶  
 Data separation for Information Assurance can be achieved through the use of secure protocols in the PSM - e.g. DDS Security for the DDS PSM or HTTPS for the GraphQL PSM.¶  
**Configuration by a Client¶**  
 c) Submitters should discuss how clients of the C2INAV can configure the C2INAV implementation to meet their specific needs. This covers such areas as (not an exhaustive list): Data update frequency, Data latency, Data reliability and Security.¶  
 The request\_navigation\_data method allows clients to configure data update frequency at the PIM level. Use of DDS PSM allows a client to configure data update frequency, data latency, data reliability and security.¶  
**Monotonic Data-streams¶**  
 d) Submitters should discuss how the C2INAV shall either ensure that the data arrives in sequence (data monotonicity) or that the client of the C2INAV can determine that the data is not the latest value.¶  
 All reports from the Navigation System are time-stamped, this allows a client to determine whether a report is 'out-of-sequence' at the PIM level. For the DDS PSM, presentation quality of service settings can be used to specify ordering as required.¶  
**Security Protection from Cyber Threats¶**  
 e) Submitters should discuss how the C2INAV implementations can be protected from security and cyber threats.¶  
 C2INAV implementations can be protected from security and cyber threats by using authentication, permission enforcing and encryption protocols in the PSMs such as Secure DDS and HTTPS¶  
 Modular Data Model and Services separate information that potential has higher sensitivity (e.g. location), so protection may be applied with appropriate granularity.

Deleted: 1

For the purposes of this specification, the following terms and definitions apply.

- AB (Architecture Board)
- API (Application Programming Interface)
- BC (Business Committee)
- BCQ (Business Committee Questionnaire )
- BoD (Board of Directors)
- CCM (CORBA Component Model)
- CMS (Combat Management System)
- CORBA (Common Object Request Broker Architecture)
- CWM (Common Warehouse Metamodel)
- DAIS (Data Acquisition from Industrial Systems)
- DDS (Data Distribution Service)
- EVOT (Enhanced View of Time)
- FTF (Finalization Task Force)
- GLONASS (Global Navigation Satellite System)
- GPS (Global Positioning System)
- IDL (Interface Definition Language)
- IFF (Interrogation, Friend or Foe)
- IIOP (Internet Inter-Orb Protocol)
- IPR (Intellectual Property Right)
- ISO (International Organization for Standardization)
- LOI (Letter of Intent)
- LORAN (Long Range Navigation)
- MDA (Model Driven Architecture)
- METOC (Meteorological and Oceanographic)
- MOF (Meta Object Facility)
- MQS (MQSeries)
- NNSI (Naval Navigation System Interface)
- NS (Naming Service)
- OARIS (Open Architecture Radar Interface Standard)
- ODF (Open Document Format)
- OMG (Object Management Group)

Deleted: 1

- PIM (Platform Independent Model)
- PSM (Platform Specific Model)
- P&P (Policies and Procedures of the OMG Technical Process)
- RFC (Request For Call)
- RFP (Request For Proposal)
- RTF (Revision Task Force)
- SLAM (Simultaneous Localization and Mapping)
- SOA (Service Oriented Architecture)
- SoaML (Service oriented architecture Modeling Language)
- SOLAS (Safety Of Life At Sea)
- TC (Technology Committee)
- TF (Task Force)
- UML (Unified Modeling Language)
- XMI (XML Metadata Interchange)
- XML (eXtensible Markup Language)

## 5 Symbols

No special symbols are introduced in this specification.

## 6 Additional Information

### 6.1 Acknowledgements

The following companies submitted this specification:

- BAE Systems

# 7 Command and Control Interface for Navigation Systems

## 7.1 Introduction

The specification is captured as an Enterprise Architect (EA) UML version 2.1 model; this document being automatically generated as a report from the model.

The UML model is an extension of the OARIS model and follows the same hierarchical structure and naming conventions; this model also has dependencies on the Common Types package defined by the OARIS model (as shown in Figure 7.1) as it reuses classes defined there. The classes re-used from the OARIS specification are shown on the class diagrams service classes defined by OARIS are also re-used.

The C2INav model follows the OARIS model organization: there is a UML PIM data model (Navigation\_Domain) under the Domain\_Model package and a UML PIM for services and interfaces (Navigation\_Services) under the Service\_Interfaces package. The data model is organized by primary concerns for navigation information, for instance attitude or orientation versus absolute location in the environment, and also models the means of controlling reporting by a navigation system; a common abstraction for reporting is also modelled. The services and their interfaces model the means for a navigation system to report its data and a C2 system to control the characteristics of the navigation system's reporting.

Additionally OARIS service interfaces defined for the Provide Subsystem Identification and Manage Subsystem Parameters use cases can be used by C2 Systems to discover and configure a Navigation System. (E.g. choose to listen to a specific Navigation System having been informed of its latency and granularity characteristics).

C2INav follows OARIS modelling nomenclature whereby there are interfaces conceptually representing a CMS and a Subsystem for each use case. For C2INav, CMS should be read as representative of C2 Systems in general and Subsystem as being specifically a Navigation System.

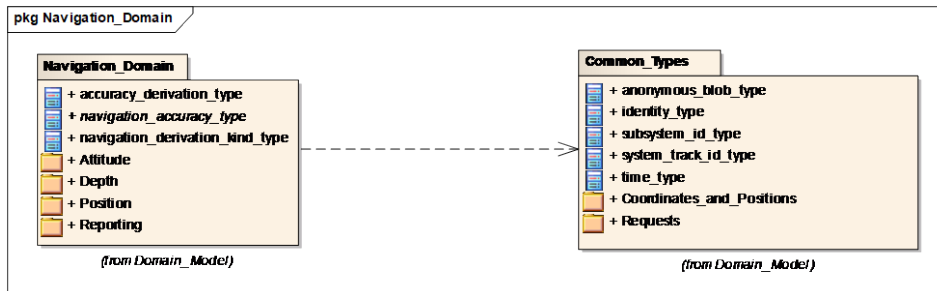


Figure 7.1 Navigation (Package diagram)

## 7.2 Navigation\_Domain

**Parent Package:** Domain\_Model

This package contains the Domain Models for the Navigation services. It is organised according to functionality: i.e. the modelling of attitude (the orientation and offset of the platform relative to its reported position), the platform's position (including velocity and acceleration), the depth of water the platform may be in and the reporting of this information.

Deleted: 1

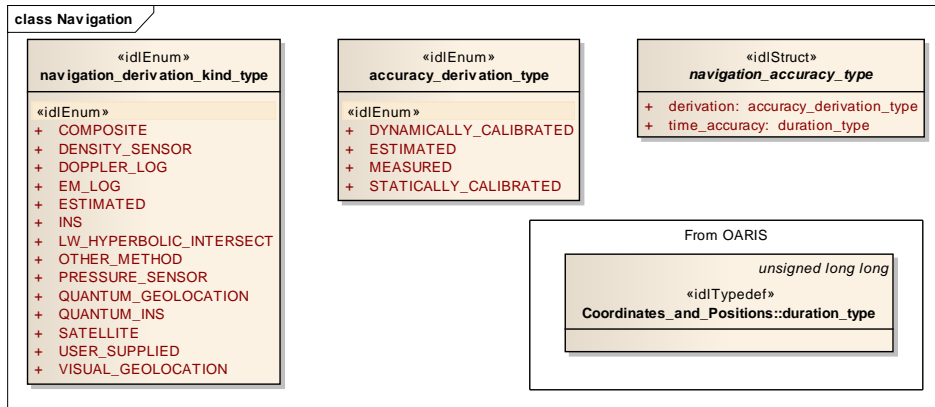


Figure 7.2 Navigation (Logical diagram)

### 7.2.1 accuracy\_derivation\_type

Type: IDLEnum

Package: Navigation\_Domain

The set of methods describing the provenance of the accuracy values

Table 7.1- Attributes of IDLEnum accuracy\_derivation\_type

Attribute	Notes
<<IDLEnum>> <b>DYNAMICALLY_CALIBRATED</b>	The accuracy values have been calibrated using real data to derive accuracy values for particular instruments given particular environmental conditions - i.e. accuracy values will in general vary over time for the same set of instruments.
<<IDLEnum>> <b>ESTIMATED</b>	The values have been set using engineering judgement.
<<IDLEnum>> <b>MEASURED</b>	The accuracy values have been measured using some dynamic process that is able to estimate the current performance of the instruments in use.
<<IDLEnum>> <b>STATICALLY_CALIBRATED</b>	The accuracy values have been calibrated using real data to derive fixed accuracy values for particular instruments.

### 7.2.2 navigation\_accuracy\_type

Type: IDLStruct

Package: Navigation\_Domain

A base type for classes that report the accuracy of navigational measurements

Table 7.2- Attributes of IDLStruct navigation\_accuracy\_type

Attribute	Notes
<b>derivation</b> accuracy_derivation_type	The provenance or method by which the accuracy values have been derived
<b>time_accuracy</b> duration_type	The accuracy (represented as one standard deviation) of the time value.

Deleted: 1

### 7.2.3 navigation\_derivation\_kind\_type

**Type:** IDLEnum

**Package:** Navigation\_Domain

This is the set of instrument types and other means by which navigation information can be derived.

Table 7.3 - Attributes of IDLEnum navigation\_derivation\_kind\_type

Attribute	Notes
«idlEnum» <b>COMPOSITE</b>	Information derived by fusing data from more than one of these types of derivation source.
«idlEnum» <b>DENSITY_SENSOR</b>	Information derived from an instrument that measures the (subsurface) sea or air density to estimate depth or altitude.
«idlEnum» <b>DOPPLER_LOG</b>	Information derived from an instrument that exploits the Doppler effect to measure speed relative to the immediate environment, particularly water.
«idlEnum» <b>EM_LOG</b>	Information derived from an instrument that exploits the electromagnetic dynamo effect (conductor moving through an electromagnetic field produces a proportional voltage) to measure speed relative to the immediate environment, particularly water.
«idlEnum» <b>ESTIMATED</b>	Information is estimated from previously measured values (e.g. dead-reckoning).
«idlEnum» <b>INS</b>	Information derived from instruments based on an Inertial Navigation System (e.g. Gyroscopes and Accelerometers)
«idlEnum» <b>LW_HYPERBOLIC_INTERSECT</b>	Navigation based on the intersection of hyperbolic curves derived from long wave radio signals from known ground stations with repeaters - e.g. LORAN B and C
«idlEnum» <b>OTHER_METHOD</b>	Information has been derived using some other technology
«idlEnum» <b>PRESSURE_SENSOR</b>	Information derived from an instrument that measures the (subsurface) sea or air pressure to estimate depth or altitude.
«idlEnum» <b>QUANTUM_GEOLOCATION</b>	Information derived by sensing the Earth's gravitational and/or magnetic field and/or their gradients using single particle systems that exploit quantum effects.
«idlEnum» <b>QUANTUM_INS</b>	Information derived from instruments based on an Inertial Navigation System that measures acceleration using single particle systems that exploit quantum techniques.
«idlEnum» <b>SATELLITE</b>	Information derived from a satellite-based navigation system (e.g. GPS and GLONASS)
«idlEnum» <b>USER_SUPPLIED</b>	Information has been supplied by the user (e.g. manual entry from a non-integrated system).
«idlEnum» <b>VISUAL_GEOLOCATION</b>	Information derived by sensing the external environment and resolving position and orientation with reference to external data such as charts (e.g. SLAM techniques).

### 7.2.4 Attitude

**Parent Package:** Navigation\_Domain

This package contains classes to model the attitude of the platform. That is the orientation and offset of the platform relative to its reported position. This package provides a data model for services that relate to micro-scale precision, supporting precise location and orientation of an individual component of the

Deleted: 1

platform

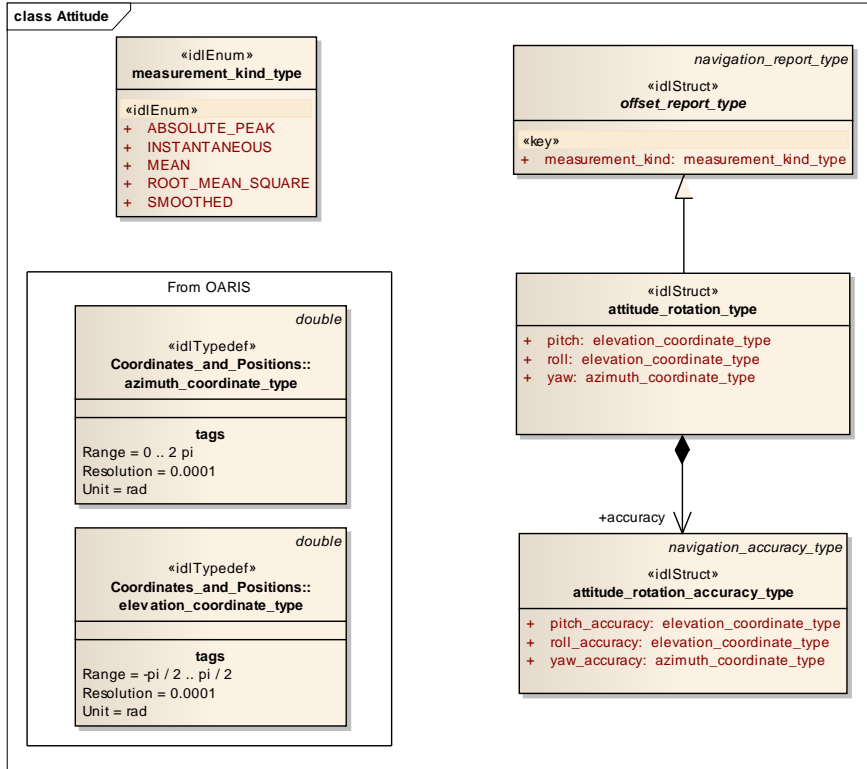


Figure 7.3 Attitude (Logical diagram)

7.2.4.1 attitude\_rotation\_accuracy\_type

Type: IDLStruct navigation\_accuracy\_type

Package: Attitude

This class encapsulates the error estimates associated with the platform's rotational attitude values. Accuracies are reported as one standard deviation.

Table 7.4 - Attributes of IDLStruct attitude\_rotation\_accuracy\_type

Attribute	Notes
pitch_accuracy elevation_coordinate_type	The accuracy of the pitch value to one standard deviation,
roll_accuracy elevation_coordinate_type	The accuracy of the roll value to one standard deviation,
yaw_accuracy azimuth_coordinate_type	The accuracy of the yaw value to one standard deviation,

7.2.4.2 attitude\_rotation\_type

Type: IDLStruct offset\_report\_type

Deleted: 1

**Package:** Attitude

This class encapsulates the instantaneous rotation of the platform from its nominal, at-rest orientation  
Non-normative: typically due to the variable motion of the environment - sea, air, etc. - through which it is travelling.

**Table 7.5 - Attributes of IDLStruct attitude\_rotation\_type**

Attribute	Notes
<b>pitch</b> elevation_coordinate_type	The pitch of the platform, relative to its platform reference point in a vertical plane. It is the clockwise angle of rotation around the lateral axis (towards starboard/right) through the center of rotation. For sea systems, the angle from horizontal to the bow; for air systems, the angle from horizontal to the nose; for land systems, the angle from horizontal to the front.
<b>roll</b> elevation_coordinate_type	The roll of the platform, relative to its platform reference point in a vertical plane. It is the angle of rotation about the longitudinal axis through the center of rotation (front-to-back). The roll angle is defined as that of the at-rest horizontal through the platform's reference on the starboard side for sea and air systems and on the right (forward facing) for land systems.
<b>yaw</b> azimuth_coordinate_type	The yaw of the platform, relative to its platform reference point in a horizontal plane. It is the angle of rotation about the vertical axis through the center of rotation (top-to-bottom) relative to the platform's course. For sea systems, the angle to the bow; for air systems, the angle to the nose; for land systems, the angle to the front.

#### 7.2.4.3 measurement\_kind\_type

**Type:** IDLEnum

**Package:** Attitude

The kind of measurement relating to the statistical process applied to the quantities in question over time.

**Table 7.6- Attributes of IDLEnum measurement\_kind\_type**

Attribute	Notes
«idlEnum» <b>ABSOLUTE_PEAK</b>	The maximum of the absolute value of the raw measurements over a complete cycle (a complete cycle is defined as the interval between local maxima).
«idlEnum» <b>INSTANTANEOUS</b>	The raw measurement at the stated time
«idlEnum» <b>MEAN</b>	The arithmetic mean (average) of the raw measurements over a complete cycle (a complete cycle is defined as the interval between local maxima).
«idlEnum» <b>ROOT_MEAN_SQUARE</b>	The root mean square average of the raw measurements over a complete cycle (a complete cycle is defined as the interval between local maxima).
«idlEnum» <b>SMOOTHED</b>	The system's best estimate for the current value of the quantities based on recent raw measurements.

#### 7.2.4.4 offset\_report\_type

**Type:** IDLStruct navigation\_report\_type

**Package:** Attitude

This is the base type for the reporting of all information that is an offset from the platform's mean reported

Deleted: 1




motion and its at-rest orientation; hence this includes attitude information. These reports are keyed on the statistical kind of measurement, enabling different views of cyclical motion to be reported.

**Table 7.7- Attributes of IDLStruct offset\_report\_type**

Attribute	Notes
«key» measurement_kind measurement_kind_type	The kind of measurement being reported.

### 7.2.4.5 Attitude.Ext

Parent Package: Attitude

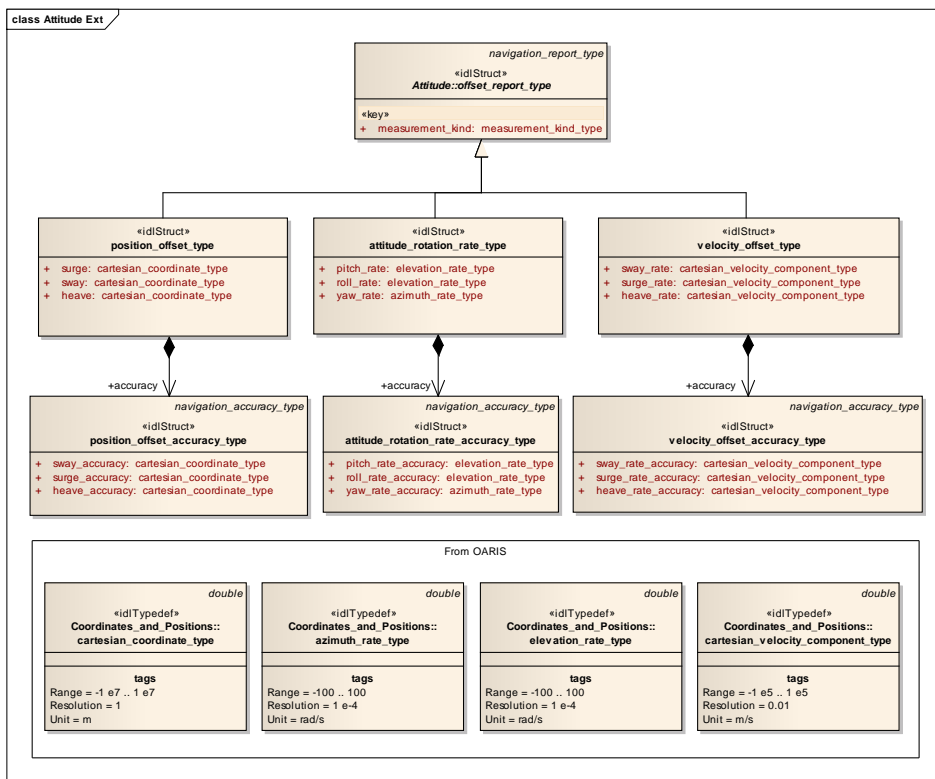

**Figure 7.4 Attitude Ext (Logical diagram)**

#### 7.2.4.5.1 attitude\_rotation\_rate\_accuracy\_type

Type: IDLStruct navigation\_accuracy\_type

Package: Ext

This class encapsulates the error estimates associated with the platform's rotational attitude rate values. Accuracies are reported as one standard deviation.

Deleted: 1

**Table 7.8 - Attributes of IDLStruct attitude\_rotation\_rate\_accuracy\_type**

Attribute	Notes
<b>pitch_rate_accuracy</b> elevation_rate_type	The accuracy of the pitch rate value to one standard deviation.
<b>roll_rate_accuracy</b> elevation_rate_type	The accuracy of the roll rate value to one standard deviation.
<b>yaw_rate_accuracy</b> azimuth_rate_type	The accuracy of the yaw rate value to one standard deviation.

**7.2.4.5.2 attitude\_rotation\_rate\_type**

**Type:** IDLStruct offset\_report\_type

**Package:** Ext

This class encapsulates the instantaneous rate of rotation of the platform (relative to the Earth).

**Table 7.9 - Attributes of IDLStruct attitude\_rotation\_rate\_type**

Attribute	Notes
<b>pitch_rate</b> elevation_rate_type	The pitch rate of the platform, relative to its platform reference point in a vertical plane. It is the rate of change of angle of rotation around the lateral axis (towards starboard/right) through the center of rotation. For sea systems, the angle to the bow; for air systems, the angle to the nose; for land systems, the angle to the front.
<b>roll_rate</b> elevation_rate_type	The roll rate of the platform, relative to its platform reference point in a vertical plane. It is the rate of change of the angle of rotation about the longitudinal axis through the center of rotation (front-to-back). The roll angle is defined as that of the at-rest horizontal through the platform's reference on the starboard side for sea and air systems and on the right (forward facing) for land systems.
<b>yaw_rate</b> azimuth_rate_type	The yaw rate of the platform, relative to its platform reference point in a horizontal plane. It is the rate of change of the angle of rotation about the vertical axis through the center of rotation (top-to-bottom) relative to the platform's course. For sea systems, the angle to the bow; for air systems, the angle to the nose; for land systems, the angle to the front.

**7.2.4.5.3 position\_offset\_accuracy\_type**

**Type:** IDLStruct navigation\_accuracy\_type

**Package:** Ext

This class encapsulates the error estimates associated with the platform's attitude offset values. Accuracies are reported as one standard deviation.

**Table 7.10 - Attributes of IDLStruct position\_offset\_accuracy\_type**

Attribute	Notes
<b>sway_accuracy</b> cartesian_coordinate_type	The accuracy of the lateral value to one standard deviation.
<b>surge_accuracy</b> cartesian_coordinate_type	The accuracy of the longitudinal value to one standard deviation.
<b>heave_accuracy</b> cartesian_coordinate_type	The accuracy of the vertical value to one standard deviation.

Deleted: 1

#### 7.2.4.5.4 position\_offset\_type

**Type:** IDLStruct offset\_report\_type

**Package:** Ext

This class encapsulates the instantaneous offset of the platform from its mean reported motion.

Non-normative: typically due to the variable motion of the environment - sea, air, etc. - through which it is travelling.

**Table 7.11 - Attributes of IDLStruct position\_offset\_type**

Attribute	Notes
sway cartesian_coordinate_type	The instantaneous offset from mean motion on the lateral horizontal axis through the platform reference point. For sea and air systems port-starboard - starboard positive For land systems side-to-side - right positive when facing forwards.
surge cartesian_coordinate_type	The instantaneous offset from mean motion on the longitudinal horizontal axis through the platform reference point. For sea systems stern-bow - bow positive For air systems tail-nose - nose positive For land systems back-to-front - front positive.
heave cartesian_coordinate_type	The instantaneous offset from mean motion on the vertical axis through the platform reference point. For sea systems keel-mast - mast positive For air and land systems bottom-to-top - top positive.

#### 7.2.4.5.5 velocity\_offset\_accuracy\_type

**Type:** IDLStruct navigation\_accuracy\_type

**Package:** Ext

This class encapsulates the error estimates associated with the platform's attitude offset rate values.

Accuracies are reported as one standard deviation.

**Table 7.12 - Attributes of IDLStruct velocity\_offset\_accuracy\_type**

Attribute	Notes
sway_rate_accuracy cartesian_velocity_component_type	The accuracy of the lateral rate value to one standard deviation,
surge_rate_accuracy cartesian_velocity_component_type	The accuracy of the longitudinal rate value to one standard deviation,
heave_rate_accuracy cartesian_velocity_component_type	The accuracy of the vertical rate value to one standard deviation,

#### 7.2.4.5.6 velocity\_offset\_type

**Type:** IDLStruct offset\_report\_type

**Package:** Ext

This class encapsulates the instantaneous rate of change of the offset of the platform from its mean reported motion.

**Table 7.13 - Attributes of IDLStruct velocity\_offset\_type**

Deleted: 1

Attribute	Notes
<b>sway_rate</b> cartesian_velocity_component_type	The instantaneous rate of change of the offset from mean motion on the lateral horizontal axis through the platform reference point. For sea and air systems port-starboard - starboard positive For land systems side-to-side - right positive when facing forwards.
<b>surge_rate</b> cartesian_velocity_component_type	The instantaneous rate of change of the offset from mean motion on the longitudinal horizontal axis through the platform reference point. For sea systems stern-bow - bow positive For air systems tail-nose - nose positive For land systems back-to-front - front positive.
<b>heave_rate</b> cartesian_velocity_component_type	The instantaneous rate of change of the offset from mean motion on the vertical axis through the platform reference point. For sea systems keel-mast - mast positive For air and land systems bottom-to-top - top positive.

### 7.2.5 Depth

**Parent Package:** Navigation\_Domain

This package contains classes to model of the depth of water the platform may be in.

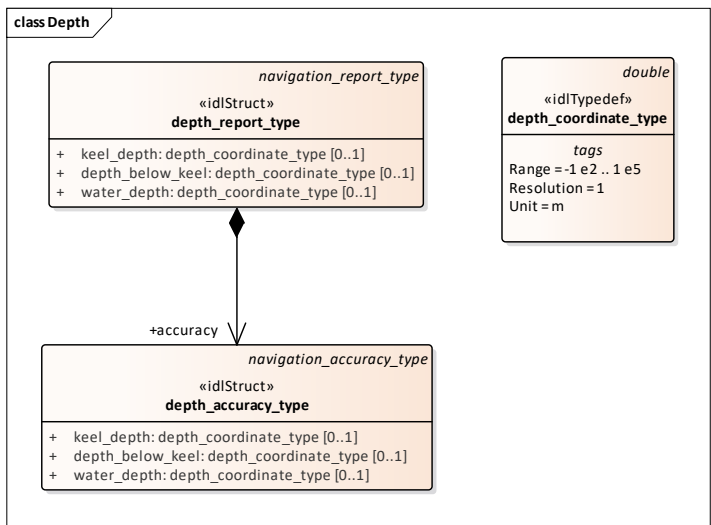


Figure 7.5 Depth (Logical diagram)

#### 7.2.5.1 depth\_coordinate\_type

**Type:** IDLTypeDef double

**Package:** Depth

Measured positive down in meters. c.f. altitude\_coordinate\_type in OARIS Common\_Types package.

Range = -1 e2 .. 1 e5

Deleted: 1

Resolution = 1  
Unit = m

### 7.2.5.2 depth\_report\_type

**Type:** IDLStruct

**Package:** Depth

Used by waterborne craft to report depth information.

**Table 7.14 - Attributes of IDLStruct depth\_report\_type**

Attribute	Notes
<b>depth_below_keel</b> depth_coordinate_type [0..1]	The depth of the bed below the keel.
<b>keel_depth</b> depth_coordinate_type [0..1]	The depth of the keel below the surface of the water.
<b>water_depth</b> depth_coordinate_type [0..1]	The depth of the bed below the water's surface.

### 7.2.5.3 depth\_accuracy\_type

**Type:** IDLStruct

**Package:** Depth

The accuracy of the platform's depth report

**Table 7.15 - Attributes of IDLStruct depth\_accuracy\_type**

Attribute	Notes
<b>depth_below_keel</b> depth_coordinate_type [0..1]	The accuracy of the depth below keel measurement.
<b>keel_depth</b> depth_coordinate_type [0..1]	The accuracy of the keel depth measurement.
<b>water_depth</b> depth_coordinate_type [0..1]	The accuracy of the water depth measurement.

## 7.2.6 Position

**Parent Package:** Navigation\_Domain

This package contains classes to model the platform's position including height/depth/altitude, velocity and acceleration. This package provides a data model for services that relate to macro-scale precision, supporting the location and motion of the platform as a point entity within its environment.

Deleted: 1

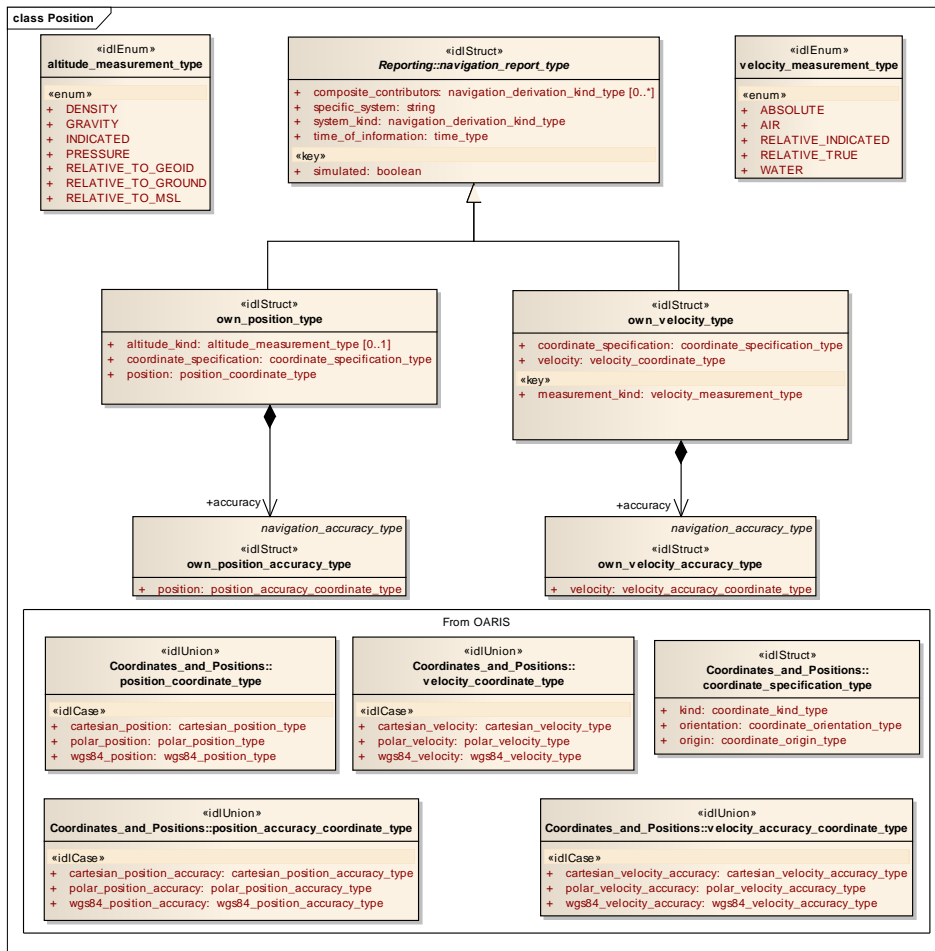


Figure 7.6 Position (Logical diagram)

### 7.2.6.1 altitude\_measurement\_type

**Type:** IDLEnum

**Package:** Position

This class indicates the semantics of the height attribute. It describes how the reported height (or depth) has been derived.

Table 7.16 - Attributes of IDLEnum altitude\_measurement\_type

Attribute	Notes
<<enum>> DENSITY	It is reporting a measurement based on local density (of air or water).
<<enum>> GRAVITY	It is reporting a measurement based on local gravity.

Deleted: 1

Attribute	Notes
«enum» <b>INDICATED</b>	As reported by the platform's own altimeter (or depth sensor). Typically, but not necessarily this is pressure related. The precise option rather than this one should be reported if known.
«enum» <b>PRESSURE</b>	It is derived from a pressure sensor.
«enum» <b>RELATIVE_TO_GEOID</b>	It is reporting a measurement made relative to the GEOID (WGS84) - e.g. using a satellite navigation system.
«enum» <b>RELATIVE_TO_GROUND</b>	The distance to the ground below (or above for underground systems) is being measured and reported.
«enum» <b>RELATIVE_TO_MSL</b>	It is reporting a measurement made relative to mean sea level.

### 7.2.6.2 own\_position\_accuracy\_type

**Type:** IDLStruct navigation\_accuracy\_type

**Package:** Position

The accuracy of the platform's own position report.

Table 7.17 - Attributes of IDLStruct own\_position\_accuracy\_type

Attribute	Notes
<b>position</b> position_accuracy_coordinate_type	The accuracy of the reported position in the chosen coordinate system for reporting. This should be the same choice as for the position itself.

### 7.2.6.3 own\_position\_type

**Type:** IDLStruct navigation\_report\_type

**Package:** Position

The platform's own position report.

Table 7.18 - Attributes of IDLStruct own\_position\_type

Attribute	Notes
<b>altitude_kind</b> altitude_measurement_type [0..1]	Describes the semantics of the position's altitude attribute. Optional: omit only if altitude is not reported.
<b>coordinate_specification</b> coordinate_specification_type	The specification of the coordinate system used for reporting own position and its accuracy. In most use cases Cartesian or WGS84, Earth Referenced choices are expected; in some use cases other choices for reporting relative to some known datum could be used.
<b>position</b> position_coordinate_type	The position of the reporting platform in the chosen coordinate system for reporting.

### 7.2.6.4 own\_velocity\_accuracy\_type

**Type:** IDLStruct navigation\_accuracy\_type

**Package:** Position

The accuracy of the platform's own velocity report.

Table 7.19 - Attributes of IDLStruct own\_velocity\_accuracy\_type

Attribute	Notes
<b>velocity</b> velocity_accuracy_coordinate_type	The accuracy of the reporting platform's velocity with reference to the coordinate system used for reporting..

### 7.2.6.5 own\_velocity\_type

**Type:** IDLStruct navigation\_report\_type

Deleted: 1

**Package:** Position  
 The platform's own velocity report.

**Table 7.20 - Attributes of IDLStruct own\_velocity\_type**

Attribute	Notes
<b>coordinate_specification</b> coordinate_specification_type	The specification of the coordinate system used for reporting own velocity and its accuracy. In most use cases Cartesian or WGS84, Earth Referenced choices are expected; in some use cases other choices for reporting relative to some known datum could be used.
«key» <b>measurement_kind</b> velocity_measurement_type	The definition of the velocity being measured.
<b>velocity</b> velocity_coordinate_type	The velocity of the reporting platform with reference to the chosen coordinate system for reporting.

### 7.2.6.6 velocity\_measurement\_type

**Type:** IDLEnum  
**Package:** Position

This class defines what it is that is having its velocity measured.

**Table 7.21 - Attributes of IDLEnum velocity\_measurement\_type**

Attribute	Notes
«enum» <b>ABSOLUTE</b>	The measurement is of absolute velocity (i.e. relative to the Earth).
«enum» <b>AIR</b>	The measurement is of the air in the local environment itself (i.e. the wind speed). This is only to be reported as a true value; i.e. it is not be based on a pressure-based 'indicated' sensor reading for relative air speed that isn't corrected for density.
«enum» <b>RELATIVE_INDICATED</b>	The measurement is of velocity relative to the environment (i.e. water or air) using an indirect approximation such as air pressure.
«enum» <b>RELATIVE_TRUE</b>	The measurement is of velocity relative to the environment (i.e. water or air) using a method that is not subject to systematic approximation error as is the case with 'Indicated Air Speed' as measured by a pressure sensor.
«enum» <b>WATER</b>	The measurement is of the water current in the local environment itself (i.e. the movement of the water).

### 7.2.6.7 Position.Ext

**Parent Package:** Position

Deleted: 1



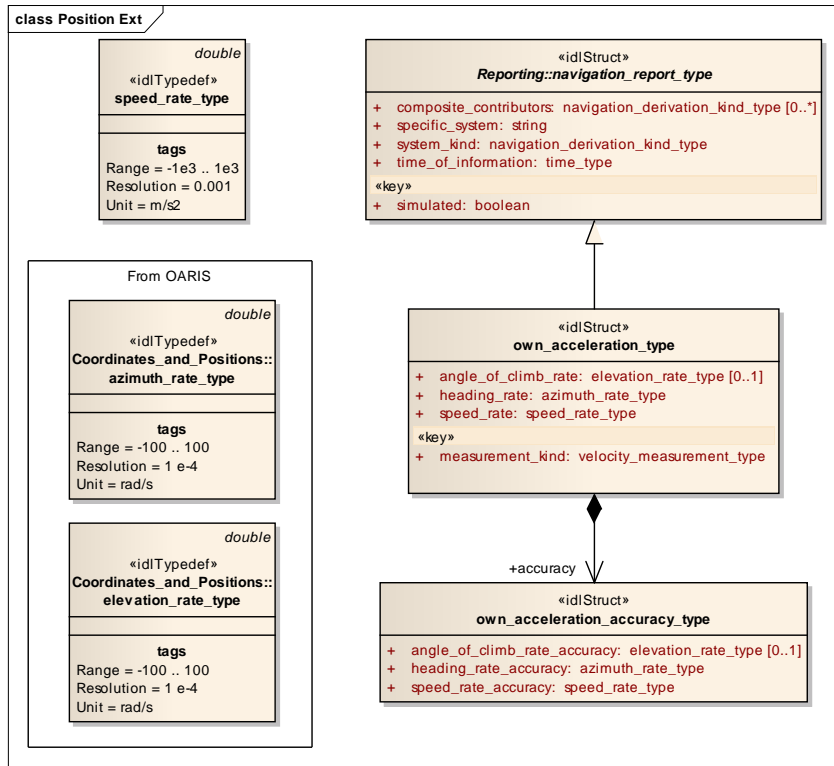


Figure 7.7 Position Ext (Logical diagram)

#### 7.2.6.7.1 own\_acceleration\_accuracy\_type

**Type:** IDLStruct

**Package:** Ext

The accuracy of the platform's own acceleration report.

Table 7.22 - Attributes of IDLStruct own\_acceleration\_accuracy\_type

Attribute	Notes
<b>angle_of_climb_rate_accuracy</b> elevation_rate_type [0..1]	The accuracy of the angle of climb rate - 1 standard deviation
<b>heading_rate_accuracy</b> azimuth_rate_type	The accuracy of the heading rate - 1 standard deviation
<b>speed_rate_accuracy</b> speed_rate_type	The accuracy of the speed rate - 1 standard deviation

#### 7.2.6.7.2 own\_acceleration\_type

**Type:** IDLStruct navigation\_report\_type

**Package:** Ext

The platform's reporting of its change in velocity

Table 7.23 - Attributes of IDLStruct own\_acceleration\_type

Deleted: 1

Attribute	Notes
<b>angle_of_climb_rate</b> elevation_rate_type [0..1]	The rate at which the angle of climb is changing
<b>heading_rate</b> azimuth_rate_type	The rate at which the heading is changing
«key» <b>measurement_kind</b> velocity_measurement_type	The definition of the acceleration (change in velocity) being measured.
<b>speed_rate</b> speed_rate_type	The rate at which the speed is changing

### 7.2.6.7.3 speed\_rate\_type

**Type:** IDLTypeDef double

**Package:** Ext

The rate of change of speed in meters per second-squared

Range = -1e3 .. 1e3

Resolution = 0.001

Unit = m/s<sup>2</sup>

## 7.2.7 Reporting

**Parent Package:** Navigation\_Domain

This package contains classes that provide a common abstraction for the reporting of navigation information.

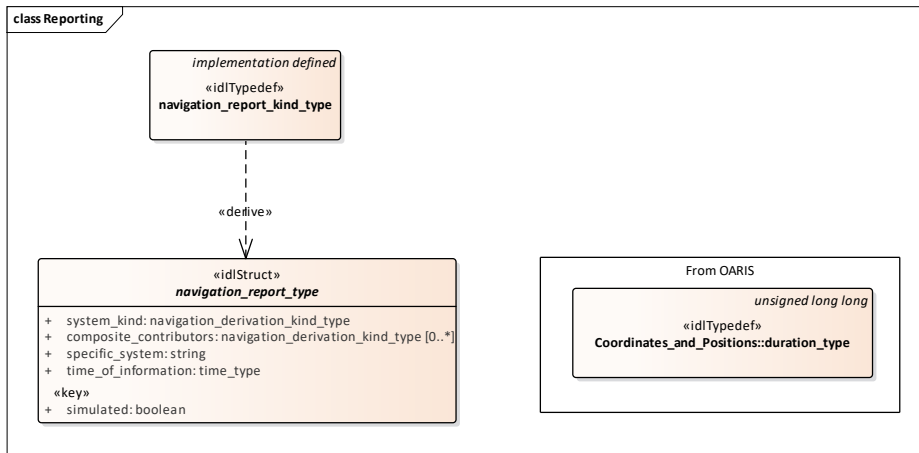


Figure 7.8 Reporting (Logical diagram)

### 7.2.7.1 navigation\_report\_kind\_type

**Type:** IDLTypeDef implementation defined

**Package:** Reporting

This class is used in service selection to specify the type of navigation report being requested. Its implementation is determined by the PSM mapping.

### 7.2.7.2 navigation\_report\_type

**Type:** IDLStruct

**Package:** Reporting

A base type for classes that report navigational measurements

Table 7.24 - Attributes of IDLStruct navigation\_report\_type

Deleted: 1

Attribute	Notes
<b>composite_contributors</b> navigation_derivation_kind_type [0..*]	An optional set of contributing sensor kinds that have been used to derive the report. This set is defined when the system_kind is COMPOSITE.
«key» <b>simulated</b> boolean	Whether the information has been simulated - e.g. for operator training.
<b>specific_system</b> string	The specific system employed - e.g. GPS, LORAN-B
<b>system_kind</b> navigation_derivation_kind_type	The generic type of navigation system used.
<b>time_of_information</b> time_type	The time for which the report values are valid.

### 7.2.7.3 Reporting.Ext

Parent Package: Reporting

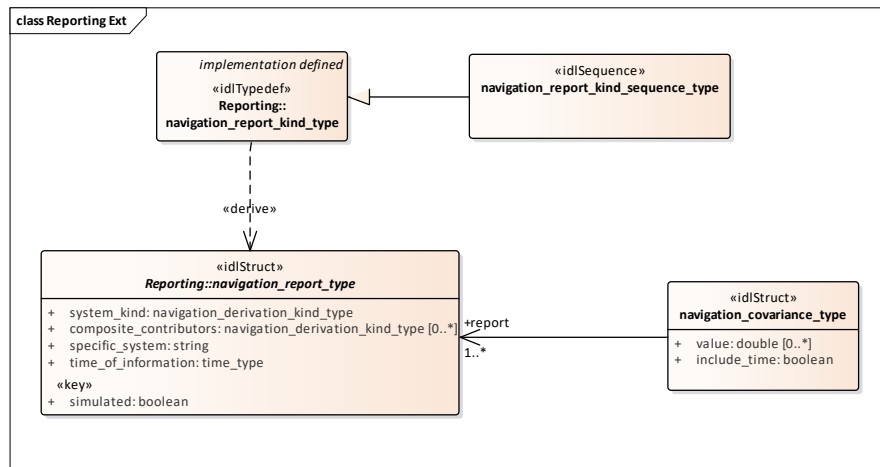


Figure 7.9 Reporting Ext (Logical diagram)

#### 7.2.7.3.1 navigation\_covariance\_type

Type: IDLStruct

Package: Ext

This class encapsulates the covariance between the measurements in one or more navigation\_report\_instances. The rows and columns of the triangular covariance matrix relate to the (3) quantities from the first instance, optionally the (3) quantities from each of the further instances and finally, optionally, time.

This, for instance allows the covariance between rotational attitude and position to be represented or the covariance between rotational attitude, position, all their rates of change and time.

Table 7.15 - Attributes of IDLStruct navigation\_covariance\_type

Attribute	Notes
<b>include_time</b> boolean	Whether time is included in the covariance - it is always represented in the last row and column.

Deleted: 1

Attribute	Notes
<b>value</b> double [0..*]	The content of the triangular covariance matrix omitting symmetric (duplicate) values. Valid lengths are $\text{sum}(n=1..*; 3n)$ and $\text{sum}(n=1..*; 3n+1)$ . The sequence starts 6, 10, 21, 28, 45, ...

### 7.2.7.3.2 navigation\_report\_kind\_sequence\_type

**Type:** IDLSequence navigation\_report\_kind\_type

**Package:** Ext

A sequence of navigation report kinds. It is expected that this class will map to implementation specific mechanisms in PSMs.

## 7.2.8 Reporting

**Parent Package:** Navigation\_Domain

This package contains classes that encapsulate the information that can parameterize the reporting of navigation information.

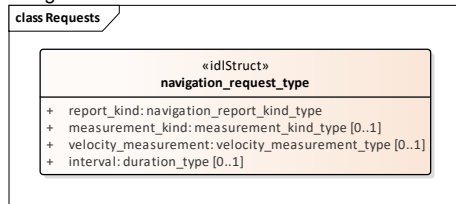


Figure 7.10 Requests (Logical diagram)

### 7.2.8.1 navigation\_request\_type

**Type:** IDLStruct

**Package:** Reporting

This class is used to construct requests for data to a navigation system and also to cancel such requests. When used to cancel requests the interval should be omitted by the C2 System and ignored by the Navigation System.

Table 7.6 - Attributes of IDLStruct navigation\_request\_type

Attribute	Notes
<b>interval</b> duration_type [0..1]	The nominal interval between reports being requested. Omit to request at the default rate for the navigation system.
<b>measurement_kind</b> measurement_kind_type [0..1]	The kind of statistical reporting of the measurements being requested. Omit to request all measurement kinds supported by the navigation system.
<b>report_kind</b> navigation_report_kind_type	The type of data to be reported in response to the request.
<b>velocity_measurement</b> velocity_measurement_type [0..1]	The type of velocity measurement requested. This is only valid if the report kind indicates velocity. Omit to request all velocity measurements supported by the navigation system.

## 7.3 Navigation\_Services

**Parent Package:** Service\_Interfaces

The Navigation Services define the methods for a Navigation System to report its data to a C2 System

Deleted: 1

and for a C2 System to control the rate and content of the data reported by a Navigation System. The usage of these services is presented in a series of sequence diagrams aligned with this specification's conformance points from section 2; basic flows describe normal operation and alternative flows describe error handling. Navigation\_CMS and Navigation\_Sub are the interfaces to be implemented by C2 (including CMS) and Navigation System components respectively.

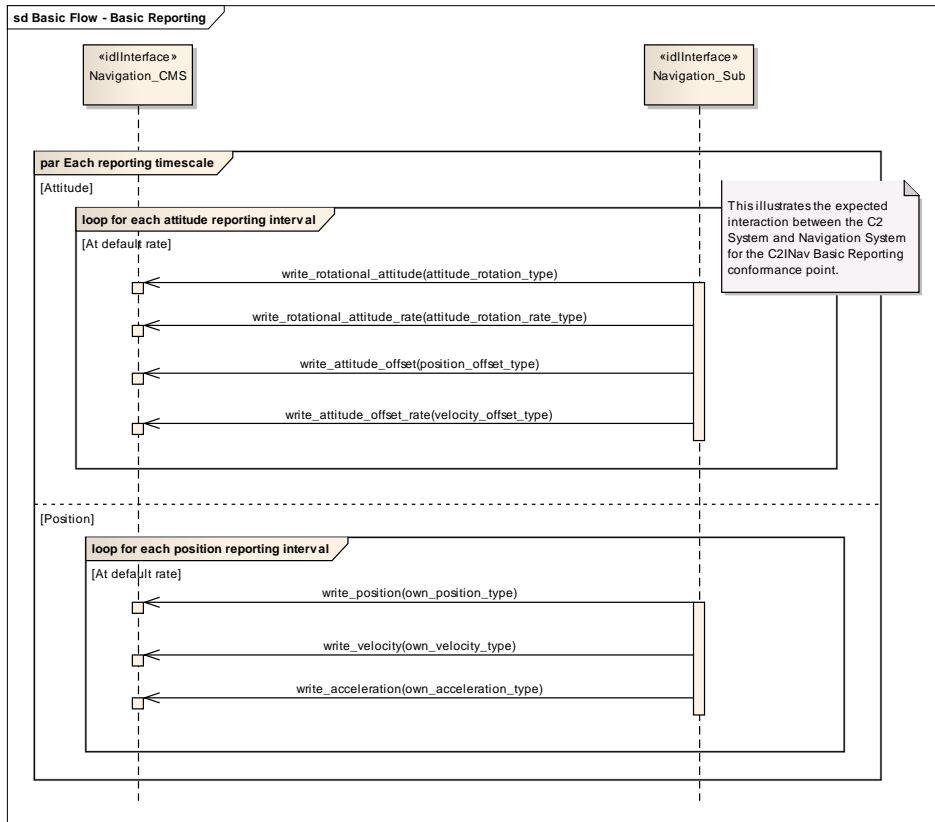


Figure 7.11 Basic Flow - Basic Reporting (Sequence diagram)

Deleted: 1


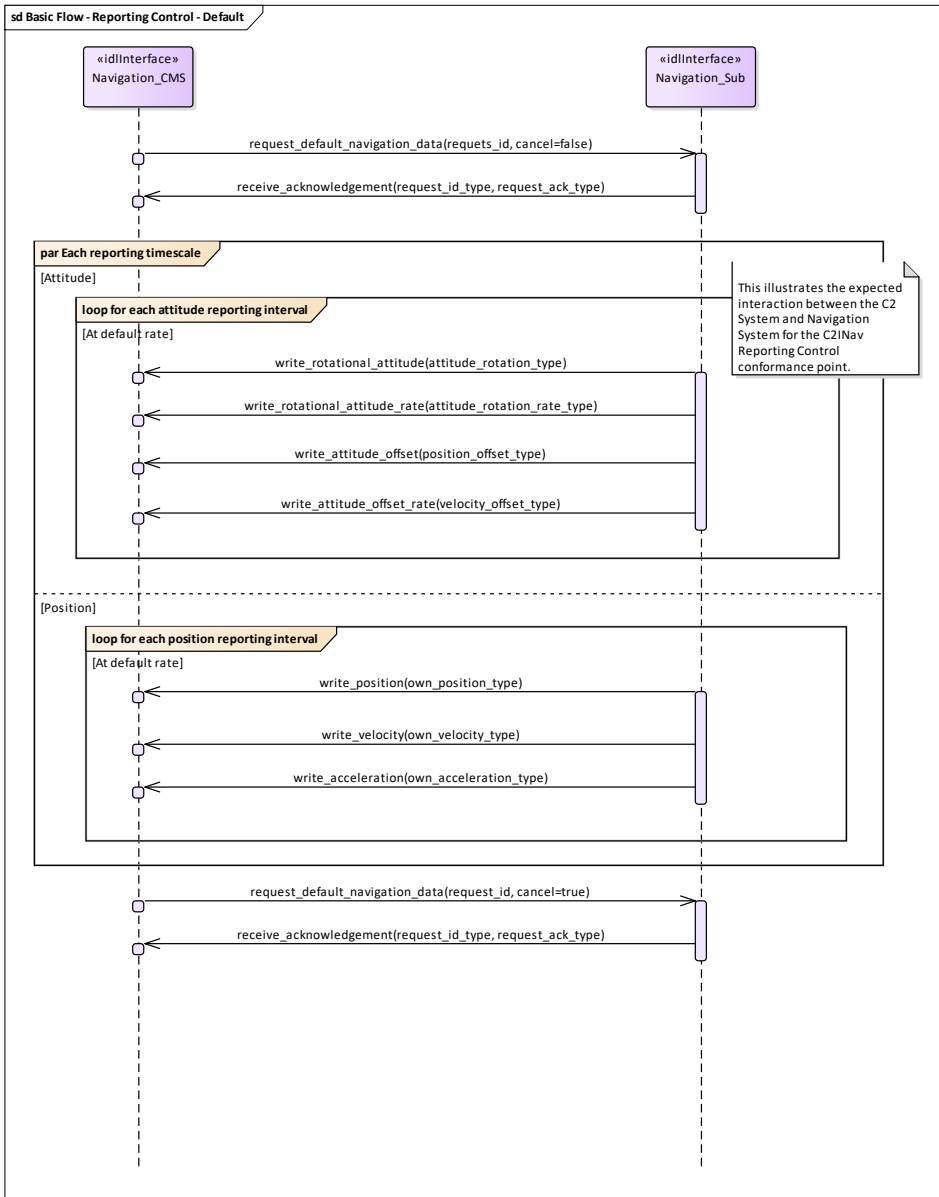


Figure 7.12 Basic Flow - Reporting Control - Default (Sequence diagram)

Deleted: 1

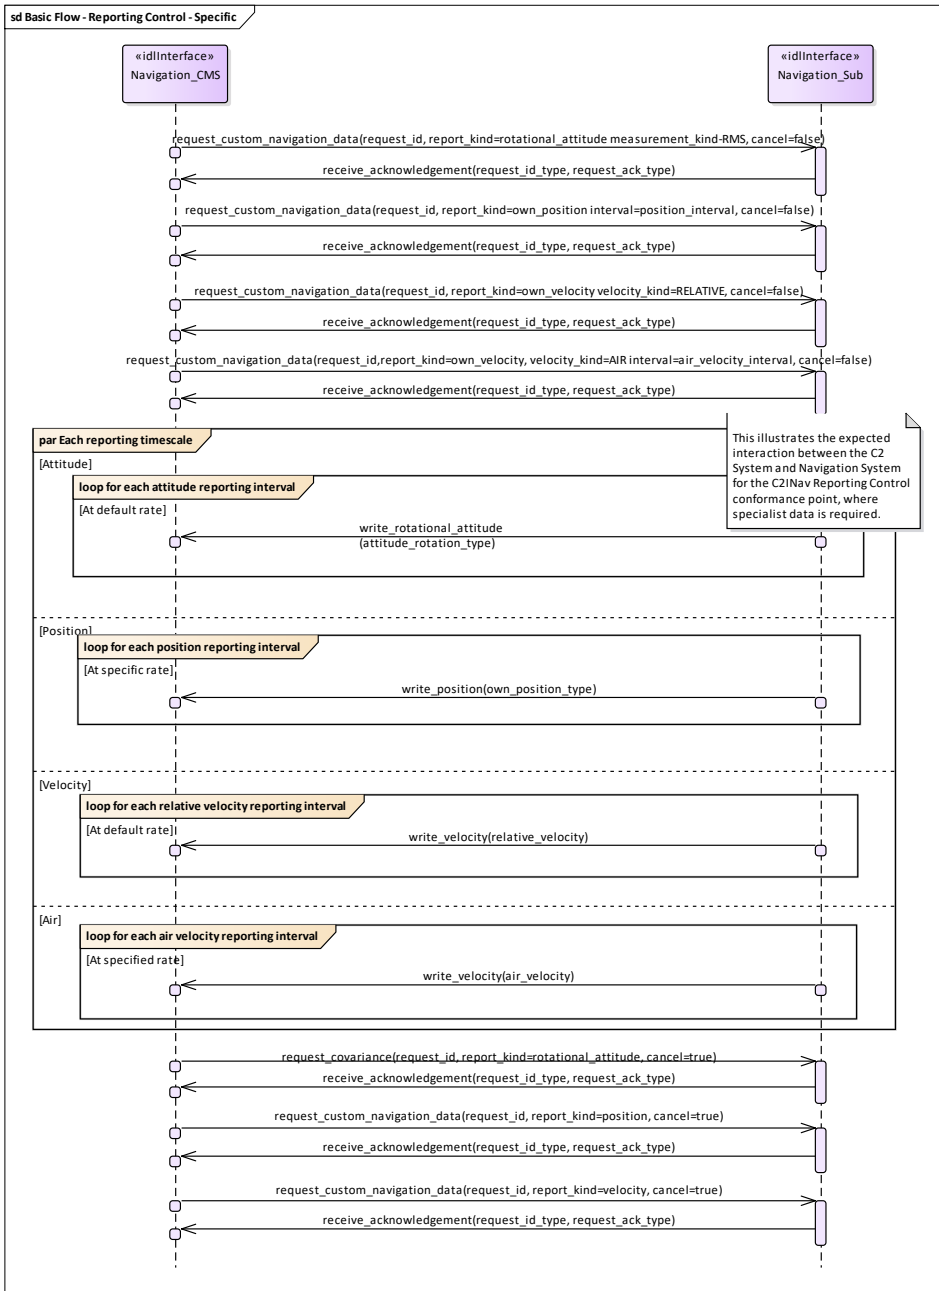

Deleted: 1

Figure 7.13 Basic Flow - Reporting Control - Specific (Sequence diagram)

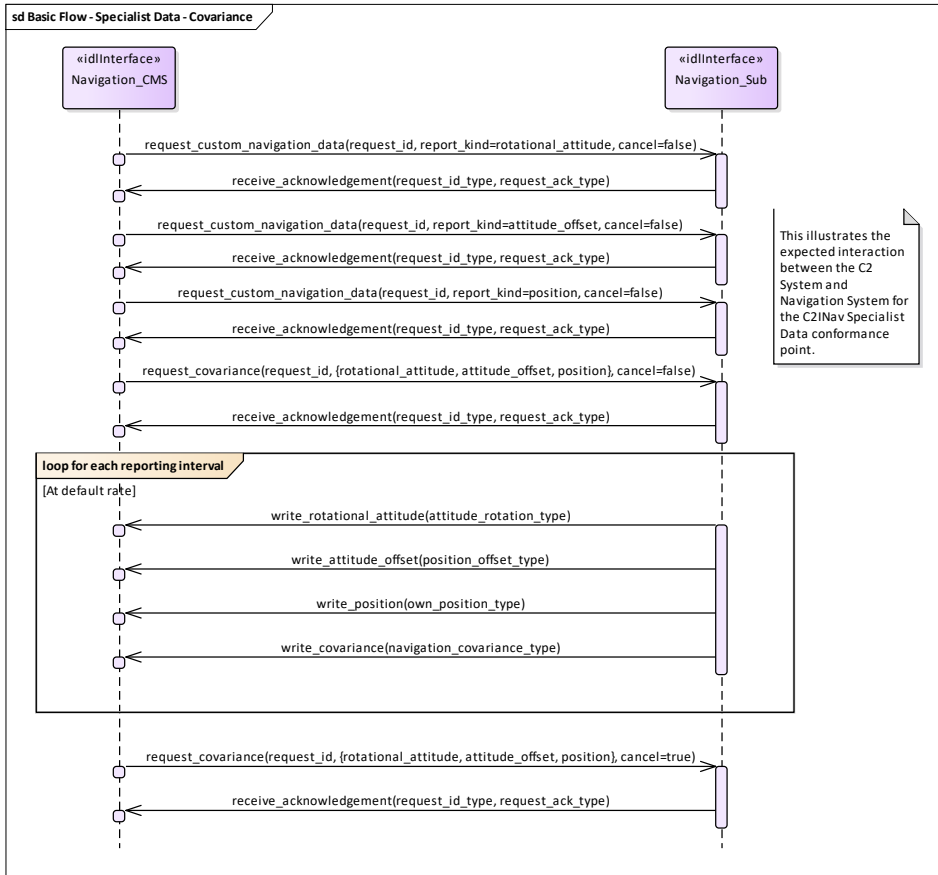


Figure 7.14 Basic Flow - Specialist Data - Covariance (Sequence diagram)

Deleted: 1



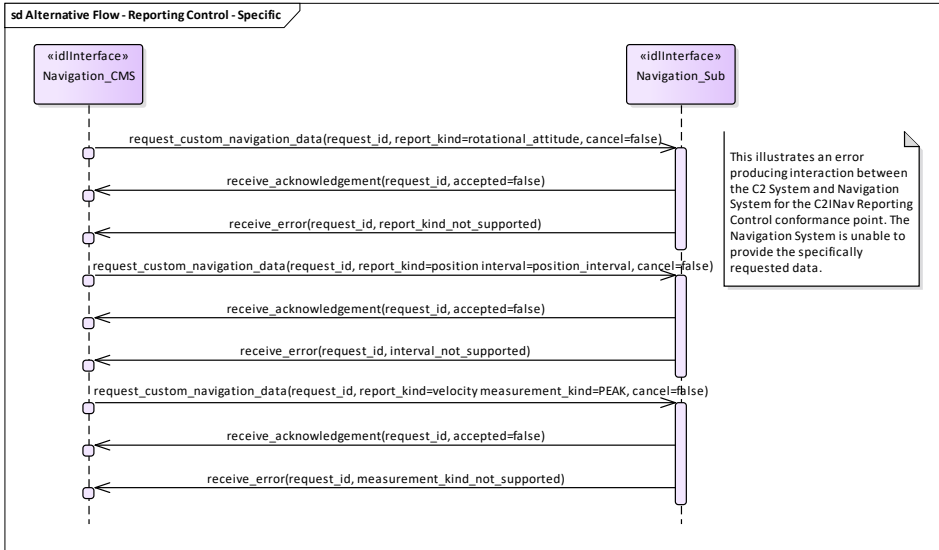


Figure 7.15 Alternative Flow - Reporting Control - Specific (Sequence diagram)

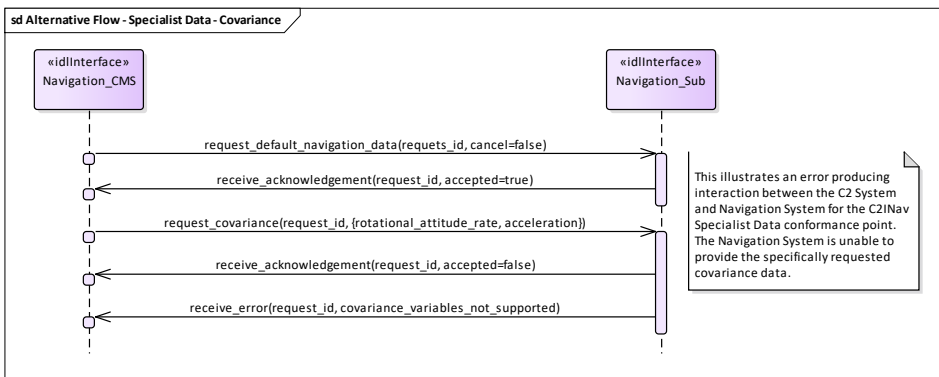


Figure 7.16 Alternative Flow - Specialist Data - Covariance (Sequence diagram)

Deleted: 1

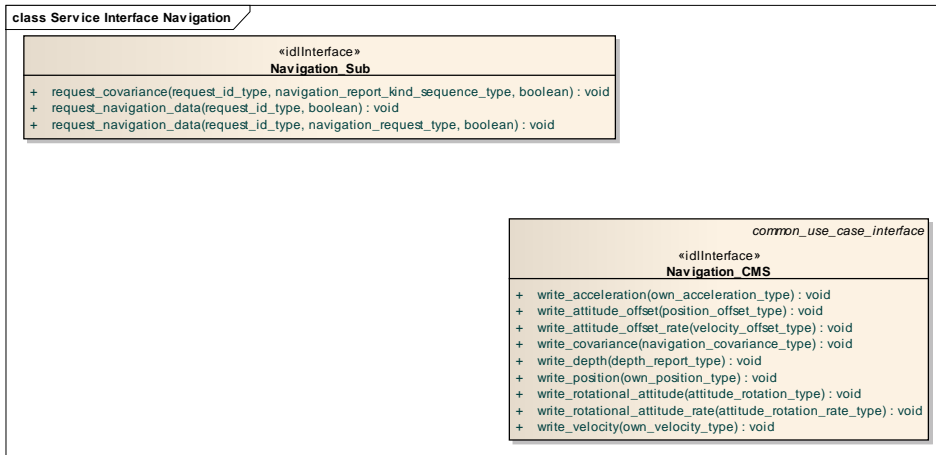


Figure 7.17 Service Interface Navigation (Logical diagram)

### 7.3.1 Navigation\_CMS

**Type:** IDLInterface common\_use\_case\_interface

**Package:** Navigation\_Services

The interface implemented by C2 components to consume C2INav services

Table 7.27 - Methods of IDLInterface Navigation\_CMS

Method	Notes	Parameters
write_acceleration()		own_acceleration_type <b>acceleration</b>
write_attitude_offset()		position_offset_type <b>offset</b>
write_attitude_offset_rate()		velocity_offset_type <b>rate</b>
write_covariance()	The reported covariance between the selected quantities.	navigation_covariance_type <b>covariance</b>
write_depth()		depth_report_type <b>depth</b>
write_position()		own_position_type <b>position</b>
write_rotational_attitude()		attitude_rotation_type <b>rotation</b>
write_rotational_attitude_rate()		attitude_rotation_rate_type <b>rate</b>
write_velocity()		own_velocity_type <b>velocity</b>

### 7.3.2 Navigation\_Sub

**Type:** IDLInterface

**Package:** Navigation\_Services

Deleted: 1

The interface implemented by a navigation system to provide C2INav services.

**Table 7.28 - Methods of IDLInterface Navigation\_Sub**

Method	Notes	Parameters
<b>request_covariance()</b>	Requests the covariance between a chosen set of quantities to be reported. The covariance is to be reported at the fastest reporting rate of the chosen quantities. Can also cancel requests to the navigation system to send the particular covariance information.	request_id_type <b>request_id</b> navigation_report_kind_sequence_type <b>report_kinds</b> boolean <b>cancel</b>
<b>request_default_navigation_data()</b>	Request the navigation system to send all its available navigational information at the navigation system's default rate for the data. Where the reported data can have different statistical representations (measurement kinds) all forms supported by the navigation subsystem are reported at the navigation system's default rate for that measurement and report kind. Can also cancel requests to the navigation system to send any of its available navigational information.	request_id_type <b>request_id</b> boolean <b>cancel</b>
<b>request_custom_navigation_data()</b>	Request the navigation system to send a particular kind of navigation report with specified measurement types at a configurable interval. If the data is already being reported then this request updates the interval at which it is reported (or sets it to the navigation system's default rate); it does not act cumulatively on existing data reporting. Can also cancel requests to the navigation system to send any of its available navigational information.	request_id_type <b>request_id</b> navigation_request_type <b>request</b> boolean <b>cancel</b>

Deleted: 1

## 8 Domain Model Platform-Specific Models

### 8.1 DDS PSM

The DDS Data Model PSM defines a set of IDL files for the Data Model packages defined by the PIM. Topic types (i.e. IDL structs with keys) are defined for those IDL struct stereotyped classes that classify a single parameter on an interface method. This avoids redundant indirection. Comments are added to the IDL files to reflect the mapping rules below.

IDL types referred to by this PSM but defined by OARIS are to be found in the DDS PSM files for the OARIS specification. This specification depends upon `Common_Types.idl`, `Coordinates_and_Positions.idl` and `TimeBase.idl`.

The detailed rules for the MDA code generation from the Data Model PIM to the DDS PSM IDL are as follows:

- The PIM attributes are mapped to IDL attributes;
- Optional attributes are mapped to a union type with a single member present when the exists case attribute is true;
- Collections in the PIM are mapped to IDL sequences;
- Specialization / Generalization PIM relationships are mapped to in-lined base type attributes
- Navigable association to topic instance types are mapped to a key value, or set of values defined by a struct, where there are multiple keys. Where the association is to a generalization a union of the possible key types of the specializations is used. Unions and supporting enumerations are defined irrespective of the existence of associations to use them. One-to-many associations map to a bounded sequence of such values.

### 8.2 GraphQL PSM

The GraphQL Data Model PSM defines a single combined schema file for the Data Model and Service Model. defined by the PIM.

The detailed rules for the MDA code generation from the Data Model PIM to the DDS PSM IDL are as follows:

- The PIM attributes are mapped to GraphQL type attributes;
- Mandatory attributes are mapped to a mandatory GraphQL attributes with an exclamation mark – '!';
- Optional attributes are mapped to a optional GraphQL attributes without an exclamation mark
- Collections in the PIM are mapped to GraphQL sequences;
- Aggregation and compositions are mapped to GraphQL attributes;
- Specialization / Generalization PIM relationships are mapped to IDL unions. Generalization classes that have attributes are mapped to a GraphQL type containing a base GraphQL type for its common attributes and a variants union for the specialization attributes.
- Navigable associations to topic instance types are mapped to a key value, or set of values defined by a GraphQL type, where there are multiple keys. Where the association is to a generalization a union of the possible key types of the specializations is used. Unions and supporting enumerations are defined irrespective of the existence of associations to use them. One-to-many associations map to a bounded sequence of such values.

## 9 Service Model Platform Specific Models

Deleted: 1

## 9.1 DDS PSM

The DDS Services PSM defines IDL files for each package defined in the Services PIM. For each method on each interface class an IDL struct for a DDS topic named for the method is generated; each parameter is mapped to an attribute of the IDL struct. This is unless there is only one attribute (of IDL struct stereotype) in which case the topic type is defined in the Domain Model (i.e. it corresponds to the parameter's class). Note that the PIM only defines in parameters, there are no return parameters defined and all methods have at least one parameter.

The DDS PSM maps the `request_all_navigation_data` and `request_navigation_data` method to the DDS discovery, publish and subscribe functionality. Consequently these methods are not explicitly defined by the DDS IDL.

## 9.2 GraphQL PSM

The GraphQL Data Model PSM defines a single combined schema file for the Data Model and Service Model, defined by the PIM.

The schema supports GraphQL clients for the interfaces defined for the CMS and Subsystem components in the Service Model PIM. Mutations are used to invoke PIM interface methods; queries and subscriptions are used to process those invocations.

The PSM method for connecting to other components is through the underlying HTTPS web service connection. Web-sockets are used for subscription callbacks.

Specific rules for the MDA code generation from the Service Model PIM to the GraphQL PSM IDL are as follows:

- Each interface method in the Service Model is mapped to a (query) type, an input type and update type based on the method parameters; these are for queries, mutations and subscriptions respectively.
- To invoke a method a client makes a mutation.
- To process a method a client makes a subscription or query.
- The GraphQL schema Query type supports queries for any combination of interface methods in the Service Model.
- The GraphQL schema Mutation type supports invocation of single or multiple instances of any combination of interface methods in the Service Model.
- The GraphQL schema Subscription type supports subscription for any combination of interface methods in the Service Model.
- The GraphQL PSM maps the `request_all_navigation_data` and `request_navigation_data` methods to the GraphQL subscription types.

Deleted: 1