Date: February 2013



TACSIT Controller Interface

Version 1.0

OMG Document Number: formal/2013-02-03 Standard document URL: http://www.omg.org/spec/TCI/1.0 Associated Schema Files*: Normative: http://www.omg.org/spec/TCI/20120210/TACSIT_PIM.xmi http://www.omg.org/spec/TCI/20120210/java/TACSIT_JavaPSM_src.zip http://www.omg.org/spec/TCI/20120210/CPP/TACSIT_CppPSM_src.zip http://www.omg.org/spec/TCI/20120210/java/TACSIT_JavaPSM.xmi http://www.omg.org/spec/TCI/20120210/java/TACSIT_JavaPSM.xmi Copyright © 2007, 2008, 2009, 2010 BAE Systems Copyright © 2007, 2008, 2009, 2010 Gallium Copyright © 2007, 2008, 2009, 2010 Luciad Copyright © 2013, Object Management Group, Inc. Copyright © 2007, 2008, 2009, 2010 Raytheon Solipsys Copyright © 2007, 2008, 2009, 2010 SimVentions

USE OF SPECIFICATION - TERMS, CONDITIONS & NOTICES

The material in this document details an Object Management Group specification in accordance with the terms, conditions and notices set forth below. This document does not represent a commitment to implement any portion of this specification in any company's products. The information contained in this document is subject to change without notice.

LICENSES

The companies listed above have granted to the Object Management Group, Inc. (OMG) a nonexclusive, royalty-free, paid up, worldwide license to copy and distribute this document and to modify this document and distribute copies of the modified version. Each of the copyright holders listed above has agreed that no person shall be deemed to have infringed the copyright in the included material of any such copyright holder by reason of having used the specification set forth herein or having conformed any computer software to the specification.

Subject to all of the terms and conditions below, the owners of the copyright in this specification hereby grant you a fully-paid up, non-exclusive, nontransferable, perpetual, worldwide license (without the right to sublicense), to use this specification to create and distribute software and special purpose specifications that are based upon this specification, and to use, copy, and distribute this specification as provided under the Copyright Act; provided that: (1) both the copyright notice identified above and this permission notice appear on any copies of this specification; (2) the use of the specifications is for informational purposes and will not be copied or posted on any network computer or broadcast in any media and will not be otherwise resold or transferred for commercial purposes; and (3) no modifications are made to this specification. This limited permission automatically terminates without notice if you breach any of these terms or conditions. Upon termination, you will destroy immediately any copies of the specifications in your possession or control.

PATENTS

The attention of adopters is directed to the possibility that compliance with or adoption of OMG specifications may require use of an invention covered by patent rights. OMG shall not be responsible for identifying patents for which a license may be required by any OMG specification, or for conducting legal inquiries into the legal validity or scope of those patents that are brought to its attention. OMG specifications are prospective and advisory only. Prospective users are responsible for protecting themselves against liability for infringement of patents.

GENERAL USE RESTRICTIONS

Any unauthorized use of this specification may violate copyright laws, trademark laws, and communications regulations and statutes. This document contains information which is protected by copyright. All Rights Reserved. No part of this work covered by copyright herein may be reproduced or used in any form or by any means--graphic, electronic, or mechanical, including

photocopying, recording, taping, or information storage and retrieval systems--without permission of the copyright owner.

DISCLAIMER OF WARRANTY

WHILE THIS PUBLICATION IS BELIEVED TO BE ACCURATE, IT IS PROVIDED "AS IS" AND MAY CONTAIN ERRORS OR MISPRINTS. THE OBJECT MANAGEMENT GROUP AND THE COMPANIES LISTED ABOVE MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS PUBLICATION, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF TITLE OR OWNERSHIP, IMPLIED WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR USE. IN NO EVENT SHALL THE OBJECT MANAGEMENT GROUP OR ANY OF THE COMPANIES LISTED ABOVE BE LIABLE FOR ERRORS CONTAINED HEREIN OR FOR DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL, RELIANCE OR COVER DAMAGES, INCLUDING LOSS OF PROFITS, REVENUE, DATA OR USE, INCURRED BY ANY USER OR ANY THIRD PARTY IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS MATERIAL, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The entire risk as to the quality and performance of software developed using this specification is borne by you. This disclaimer of warranty constitutes an essential part of the license granted to you to use this specification.

RESTRICTED RIGHTS LEGEND

Use, duplication or disclosure by the U.S. Government is subject to the restrictions set forth in subparagraph (c) (1) (ii) of The Rights in Technical Data and Computer Software Clause at DFARS 252.227-7013 or in subparagraph (c)(1) and (2) of the Commercial Computer Software - Restricted Rights clauses at 48 C.F.R. 52.227-19 or as specified in 48 C.F.R. 227-7202-2 of the DoD F.A.R. Supplement and its successors, or as specified in 48 C.F.R. 12.212 of the Federal Acquisition Regulations and its successors, as applicable. The specification copyright owners are as indicated above and may be contacted through the Object Management Group, 109 Highland Avenue, Needham, MA 02494, U.S.A.

TRADEMARKS

MDA®, Model Driven Architecture®, UML®, UML Cube logo®, OMG Logo®, CORBA® and XMI® are registered trademarks of the Object Management Group, Inc., and Object Management GroupTM, OMGTM, Unified Modeling LanguageTM, Model Driven Architecture LogoTM, Model Driven Architecture DiagramTM, CORBA logosTM, XMI LogoTM, CWMTM, CWM LogoTM, IIOPTM, IMMTM, MOFTM, OMG Interface Definition Language (IDL)TM, and OMG SysMLTM are trademarks of the Object Management Group. All other products or company names mentioned are used for identification purposes only, and may be trademarks of their respective owners.

COMPLIANCE

The copyright holders listed above acknowledge that the Object Management Group (acting itself or through its designees) is and shall at all times be the sole entity that may authorize developers, suppliers and sellers of computer software to use certification marks, trademarks or other special designations to indicate compliance with these materials.

Software developed under the terms of this license may claim compliance or conformance with this specification if and only if the software compliance is of a nature fully matching the applicable compliance points as stated in the specification. Software developed only partially matching the applicable compliance points may claim only that the software was based on this specification, but may not claim compliance or conformance with this specification. In the event that testing suites are implemented or approved by Object Management Group, Inc., software developed using this specification may claim compliance or conformance with the software satisfactorily completes the testing suites.

OMG's Issue Reporting Procedure

All OMG specifications are subject to continuous review and improvement. As part of this process we encourage readers to report any ambiguities, inconsistencies, or inaccuracies they may find by completing the Issue Reporting Form listed on the main web page *http://www.omg.org*, under Documents, Report a Bug/Issue (*http://www.omg.org/report_issue.htm*).

Table of Contents

Preface		iii
1 Scope .		1
2 Conforn	nance Criteria	2
	ve References	
	nd Definitions	
4.1 4.2	General Definitions Terms Specific to this Specification	2 4
5 Acronyr	ns and Abbreviations	5
	al Information	
6.1	Changes or extensions to OMG specifications	5
6.2	Submitters	5
7 Platform	n Independent Model (PIM)	7
7.1	Introduction	7
	Introduction Package org.omg.tacsit.controller	
	Package org.omg.tacsit.controller	7
		7 7
	Package org.omg.tacsit.controller	7 7 7
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships	7 7 7 10
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity	7 7 7 10 15 15
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType	7 7 10 15 15 17
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName	7 7 10 15 15 17 18
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName 7.2.4.4 Interface Projection	7 7 10 15 15 17 18 18
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName 7.2.4.5 Class SelectionEvent	7 7 10 15 15 15 17 18 18 19
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener	7 7 10 15 15 15 17 18 18 19 20
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface SelectionManager	7 7 10 15 15 15 17 18 18 19 20 21
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface Entity 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface SelectionManager 7.2.4.8 Interface TACSITController	7 7 10 15 15 15 17 18 18 19 20 21 24
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface TACSITController 7.2.4.9 Class ViewEyeProperties	7 7 10 15 15 15 17 18 18 19 20 21 24 24 26
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface Entity 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface SelectionManager 7.2.4.8 Interface TACSITController	7 7 10 15 15 15 17 18 18 19 20 21 24 24 28
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface Entity 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface TACSITController 7.2.4.9 Class ViewEyeProperties 7.2.4.10 Interface Viewport 7.2.4.11 ClassViewportChangeEvent	7 7 10 15 15 15 17 18 18 18 19 20 21 24 24 28 31 32
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface EntityType 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface TACSITController 7.2.4.9 Class ViewEyeProperties 7.2.4.10 Interface Viewport 7.2.4.11 ClassViewportChangeEvent 7.2.4.13 Interface ViewportManager	7 7 10 15 15 15 17 18 18 19 20 21 24 24 24 24 24 24 24 24 24 31 32 32
	Package org.omg.tacsit.controller 7.2.1 Top Level Interfaces and Relationships 7.2.2 Selection Interfaces and Relationships 7.2.3 Viewport Interfaces and Relationships 7.2.4 Class / Interface Specifications 7.2.4.1 Interface Entity 7.2.4.2 Interface Entity 7.2.4.3 getTypeName 7.2.4.4 Interface Projection 7.2.4.5 Class SelectionEvent 7.2.4.6 Interface SelectionListener 7.2.4.7 Interface TACSITController 7.2.4.9 Class ViewEyeProperties 7.2.4.10 Interface Viewport 7.2.4.11 ClassViewportChangeEvent	7 7 10 15 15 15 17 18 18 19 20 21 24 24 24 24 24 31 32 32 34

7.2.4.16 EnumerationSelectionMethodology	36
7.3 Package org.omg.tacsit.query	
7.3.1 Class / Interface Specifications	
7.3.1.1 Interface ContainmentQuery	38
7.3.1.2 Interface EntityQuery	
7.3.1.3 Interface EntityTypeQuery	
7.3.1.4 Interface GeometryQuery	39
7.3.1.5 Interface IntersectionQuery	40
7.3.1.6 InterfaceQueryManager	40
7.4 Package org.omg.tacsit.geometry4	
7.4.1 Class / Interface Specifications	42
7.4.1.1 Interface Geometry	42
7.4.1.2 Interface GeodeticPosition	43
7.4.1.3 Class ScreenPosition	44
7.4.1.4 Interface Centered	45
7.4.1.5 Interface Circle	45
7.4.1.6 Rectangle	46
7.4.1.7 Interface Angle	47
8 Java Platform Specific Model5	53
9 C++ Platform Specific Model 5	55

Preface

About the Object Management Group

OMG

Founded in 1989, the Object Management Group, Inc. (OMG) is an open membership, not-for-profit computer industry standards consortium that produces and maintains computer industry specifications for interoperable, portable, and reusable enterprise applications in distributed, heterogeneous environments. Membership includes Information Technology vendors, end users, government agencies, and academia.

OMG member companies write, adopt, and maintain its specifications following a mature, open process. OMG's specifications implement the Model Driven Architecture® (MDA®), maximizing ROI through a full-lifecycle approach to enterprise integration that covers multiple operating systems, programming languages, middleware and networking infrastructures, and software development environments. OMG's specifications include: UML® (Unified Modeling Language[™]); CORBA® (Common Object Request Broker Architecture); CWM[™] (Common Warehouse Metamodel); and industry-specific standards for dozens of vertical markets.

More information on the OMG is available at <u>http://www.omg.org/</u>.

OMG Specifications

As noted, OMG specifications address middleware, modeling, and vertical domain frameworks. All OMG specifications are available from the OMG website at:

http://www.omg.org/spec

Specifications are organized by the following categories:

Business Modeling Specifications

Middleware Specifications

- CORBA/IIOP
- Data Distribution Services
- Specialized CORBA

IDL/Language Mapping Specifications

Modeling and Metadata Specifications

- UML, MOF, CWM, XMI
- UML Profile

Modernization Specifications

Platform Independent Model (PIM), Platform Specific Model (PSM), Interface Specifications

- CORBAServices
- CORBAFacilities

OMG Domain Specifications

CORBA Embedded Intelligence Specifications

CORBA Security Specifications

All of OMG's formal specifications may be downloaded without charge from our website. (Products implementing OMG specifications are available from individual suppliers.) Copies of specifications, available in PostScript and PDF format, may be obtained from the link cited above or by contacting the Object Management Group, Inc. at:

OMG Headquarters 109 Highland Avenue Needham, MA 02494 USA Tel: +1-781-444-0404 Fax: +1-781-444-0320 Email: <u>pubs@omg.org</u>

Certain OMG specifications are also available as ISO standards. Please consult http://www.iso.org

Typographical Conventions

The type styles shown below are used in this document to distinguish programming statements from ordinary English. However, these conventions are not used in tables or section headings where no distinction is necessary.

Times/Times New Roman - 10 pt.: Standard body text

Helvetica/Arial - 10 pt. Bold: OMG Interface Definition Language (OMG IDL) and syntax elements.

Courier - 10 pt. Bold: Programming language elements.

Helvetica/Arial - 10 pt: Exceptions

Note – Terms that appear in *italics* are defined in the glossary. Italic text also represents the name of a document, specification, or other publication.

Issues

The reader is encouraged to report any technical or editing issues/problems with this specification to <u>http://www.omg.org/</u> report issue.htm.

1 Scope

The domain of Combat Management Systems is characterized by a huge variety of underlying computing platforms, with different and often incompatible means of providing interactive displays. Standards-based services are essential for interoperable and open systems.

There is a fairly broad agreement of what is considered the TAC SIT software component of a tactical / strategic display system. The TACSIT component is the software that provides users awareness of entities in the operational space relative to a certain geo-spatial context. The TACSIT, by its nature, displays entities called tracks in their proper geographic location overlaid on a visual representation of a map while including additional annotations and decision aides to support the operator. The TACSIT is distinct from other display applications that work around, or in conjunction with it. The figure below provides an example of the TACSIT software component.



Figure 1.1 - Example of a TACSIT software component

There are many capabilities and services necessary to successfully implement a TACSIT software component.

Within this broader context of TACSIT services, there are several aspects to be considered such as Controllers, Maps, Tracks, Geometric, and Configuration. This specification is targeted at the Controller services necessary for TACSIT software component manipulation only. Controller Services provide a means to interact with the TACSIT software component and receive TACSIT notifications. Some general examples of Controller Services capability include such functionalities as range scaling, setting the area center/offset, setting view rotation, selecting objects, registering for events, and receiving cursor location updates.

This document specifies a standard for TACSIT Controller software services in CMS systems, consisting of a standard means of interacting with TACSIT software components.

The context of this TACSIT Controller service is defined in the following figure and associated text.

TACSIT Application Context

Note: This is an illustration of the types of interactions in a typical tactical display application. Each entity in this diagram is isolated from the others through an API.




Figure 1.2 - TACSIT Application Context

This specification focuses on the interfaces necessary for software applications to interact with the TACSIT application, to modify the state of the TACSIT configuration, and to listen for relevant state changes that occur within the TACSIT (often as a result of user interaction).

2 Conformance Criteria

Implementations of this standard are considered to be in conformance if they match one or more of the language level PSMs specified. The implementation must indicate the language PSM(s) that they match in their statement of conformance.

3 Normative References

The team considered the OGC "OpenGIS® Implementation Specification for Geographic information - Simple feature access - Part 1: Common architecture" (Doc: OGC 06-103r3; Version: 1.2.0; Date: 2006-10-05) in that:

- This OMG specification does not conflict with the OGC specification and uses the same names for types and methods where possible.
- This OMG Specification does not require a Geometry to completely implement the OGC specification.
- The OGC specification is considerably more involved and complex than the requirements for this standard therefore we have specified a simple Geometry class for this specification.

4 Terms and Definitions

4.1 General Definitions

Architecture Board (AB)	The OMG plenary that is responsible for ensuring the technical merit and MDA- compliance of RFPs and their submissions.
Board of Directors (BoD)	The OMG body that is responsible for adopting technology.
Common Object Request Broker Architecture (CORBA)	An OMG distributed computing platform specification that is independent of implementation languages.
Common Warehouse Metamodel (CWM)	An OMG specification for data repository integration.
CORBA Component Model (CCM)	An OMG specification for an implementation language independent distributed component model.
Interface Definition Language (IDL)	An OMG and ISO standard language for specifying interfaces and associated data structures.
Letter of Intent (LOI)	A letter submitted to the OMG BoD's Business Committee signed by an officer of an organization signifying its intent to respond to the RFP and confirming the organization's willingness to comply with OMG's terms and conditions, and commercial availability requirements.
Mapping	Specification of a mechanism for transforming the elements of a model conforming to a particular metamodel into elements of another model that conforms to another (possibly the same) metamodel.
Metadata	Data that represents models. For example, a UML model; a CORBA object model expressed in IDL; and a relational database schema expressed using CWM.
Metamodel	A model of models.
Meta Object Facility (MOF)	An OMG standard, closely related to UML, that enables metadata management and language definition.
Model	A formal specification of the function, structure and/or behavior of an application or system.
Model Driven Architecture (MDA)	An approach to IT system specification that separates the specification of functionality from the specification of the implementation of that functionality on a specific technology platform.
Normative	Provisions that one must conform to in order to claim compliance with the standard. (as opposed to non-normative or informative which is explanatory material that is included in order to assist in understanding the standard and does not contain any provisions that must be conformed to in order to claim compliance).
Normative Reference	References that contain provisions that one must conform to in order to claim compliance with the standard that contains said normative reference.

Platform	A set of subsystems/technologies that provide a coherent set of functionality through interfaces and specified usage patterns that any subsystem that depends on the platform can use without concern for the details of how the functionality provided by the platform is implemented.
Platform Independent Model (PIM)	A model of a subsystem that contains no information specific to the platform, or the technology that is used to realize it.
Platform Specific Model (PSM)	A model of a subsystem that includes information about the specific technology that is used in the realization of it on a specific platform, and hence possibly contains elements that are specific to the platform.
Request for Information (RFI)	A general request to industry, academia, and any other interested parties to submit information about a particular technology area to one of the OMG's Technology Committee subgroups.
Request for Proposal (RFP)	A document requesting OMG members to submit proposals to the OMG's Technology Committee. Such proposals must be received by a certain deadline and are evaluated by the issuing task force.
Task Force (TF)	The OMG Technology Committee subgroup responsible for issuing a RFP and evaluating submission(s)
Technology Committee (TC)	The body responsible for recommending technologies for adoption to the BoD. There are two TCs in OMG - Platform TC (PTC), that focuses on IT and modeling infrastructure related standards; and Domain TC (DTC), that focus on domain specific standards.
Unified Modeling Language (UML)	An OMG standard language for specifying the structure and behavior of systems. The standard defines an abstract syntax and a graphical concrete syntax.
UML Profile	A standardized set of extensions and constraints that tailors UML to particular use.
XML Metadata Interchange (XMI)	An OMG standard that facilitates interchange of models via XML documents.

4.2 Terms Specific to this Specification

The following set of standard terminology will henceforth be used within this document:

C4I	A term used in military and command situations that is an abbreviation for Command, Control, Computers, Communications, and Intelligence.
CMS	Combat Management System - The software systems and services used in providing command and control services to a system.
Hook Event	The selection of a track on the TACSIT. The words "selected" and "hooked" are used interchangeably within this document.
Pre-Hook	The case where the pointer is moved over a track, but no selection / hook action has been initiated by the operator or the CMS. This condition presumes a particular human interface that includes the use of a pointing device.
Primary Hook	The predominant hooked track on the TACSIT.
Secondary Hook	An alternate or subordinate hooked track on the TACSIT.

TACSIT	A Tactical Situation Display software component that provides a display of relevant tactical information over and in conjunction with the geographic context of the information.
Track	A spatial object that is managed within the CMS, such as local radar contacts, radar contacts provided via external messages, tactical data points, waypoints, etc.
Viewport	The area of visible geography displayed in the TACSIT window.

5 Acronyms and Abbreviations

CMS	(Naval) Combat Management System
CORBA	Common Object Request Broker Architecture
TACSIT	Tactical Situation (Display)
HTTP	HyperText Transfer Protocol
OMG	Object Management Group
RFP	Request For Proposal
UML	Unified Modelling Language
XML	eXtensible Mark-up Language

Table 5.1 - Acronyms and Abbreviations

6 Additional Information

6.1 Changes or extensions to OMG specifications

No changes to UML 2.0 or other OMG specifications are required.

6.2 Submitters

- BAE Systems plc
- LUCIAD
- SimVentions Inc.

7 Platform Independent Model (PIM)

7.1 Introduction

The PIM consists of the following logical packages:

- TACSIT Controller Interface (org.omg.tacsit.controller)
- TACSIT Query (org.omg.tacsit.query)
- TACSIT Geometry (org.omg.tacsit.geometry)

7.2 Package org.omg.tacsit.controller

The TACSIT Controller package contains most of the major interfaces of this specification. They are categorized in three logical groups: Top Level, Selection, and Viewport.

7.2.1 Top Level Interfaces and Relationships

The top level interface for this specification is the TACSITController interface. It provides the primary façade for working with the services herein. The following class diagram shows the relationship between the TACSITController façade and the various manager interfaces used to implement the functionality of this specification.

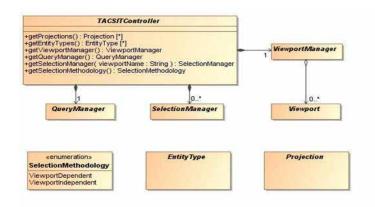


Figure 7.1 - Top Level Interfaces

7.2.2 Selection Interfaces and Relationships

The selection functionality of this standard is contained in the org.omg.tacsit.controller package. They provide the interfaces for working with the selected item in the TACSIT. The following class diagram shows the relationship between the various interfaces used to implement the functionality of this portion of the specification.

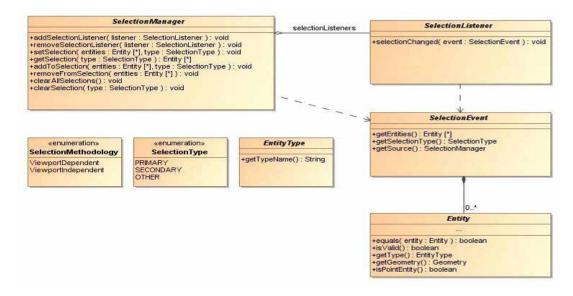



Figure 7.2 - Selection Interfaces

These interfaces are designed to support the common selection requirements involved in a TACSIT system.


These interfaces support the ability to get and set the currently selected item (primary and secondary) via API call. There are two "reserved" named selections (hooks), primary and secondary, corresponding to SelectionTypes PRIMARY and SECONDARY. Using these interfaces provides considerable flexibility in managing the selected items and allows for the following functionality.

- Select by entity / track number (TN), with the ability to specify the type or category of TN (as many CMS support multiple categories of TN per track such as System TN, Link TN, etc.).
- Select tracks within a geographic geometry such as a bounding box.
- Select tracks at a geographic point where the parameters allow for selection of the closest track(s) within a radius of the specified point.
- Select tracks with particular attribute(s) such as (Surface, Hostile, Frigate).


The following sequence patterns demonstrate how to perform these functions. These patterns support working with single entities and groups of entities.

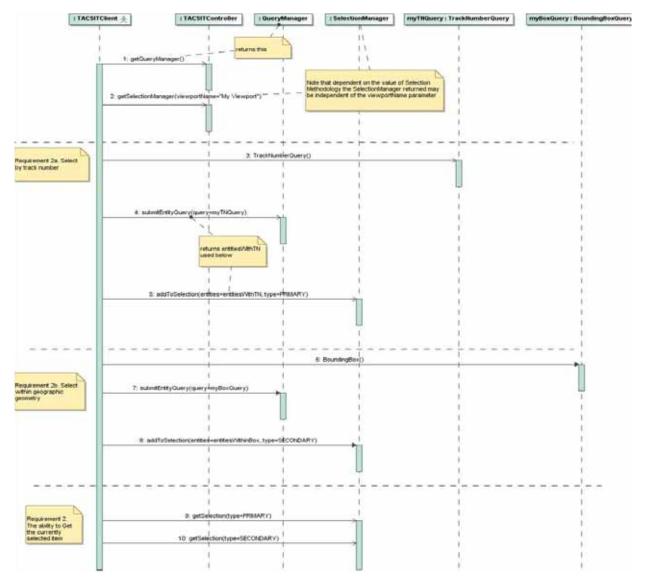

To remove objects (including tracks) from the current selection follow the sequence diagram below. You may remove all objects, a single object, multiple objects, and all objects with a particular attribute. A method to accomplish this is shown in the sequence diagram below.

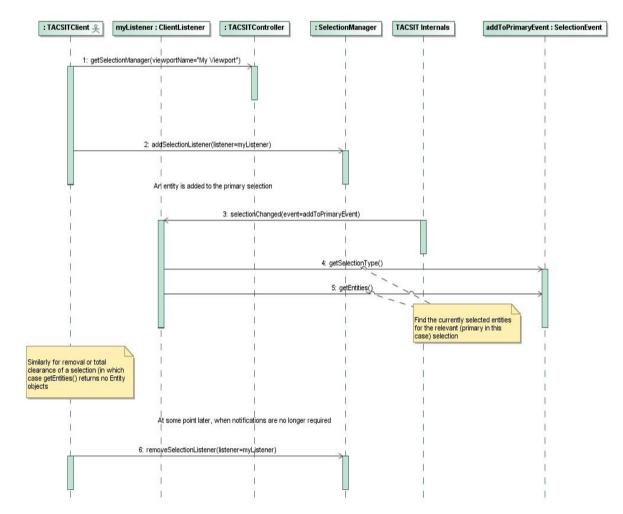

These interfaces allow you to get and set the category(ies) of selectable items and specify the categories of objects that are selectable (e.g. vehicular, non-vehicular tracks, countries, overlays, tactical points, reference points, waypoints, etc.).



7.2.3 Viewport Interfaces and Relationships

These interfaces are designed to support the common viewport requirements involved in a TACSIT system.


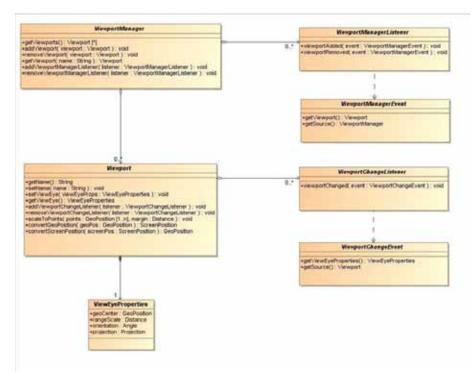



Figure 7.3 - Viewport Interfaces

These interfaces are designed to support the common viewport related requirements involved in a TACSIT system. These interfaces support the ability to manage the current view of the TACSIT. The following sub clause describes the functionality provided.


To get and set the current range scale (distance from center to nearest edge).

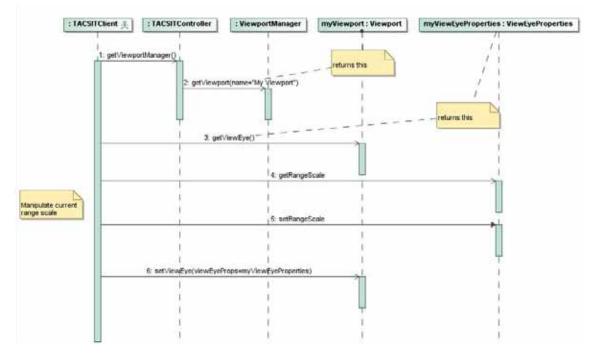


Get and set the viewport range boundaries (within the TACSIT window) by specifying two geographic points (Point 1, Point 2) and a distance buffer outside 1 and 2.

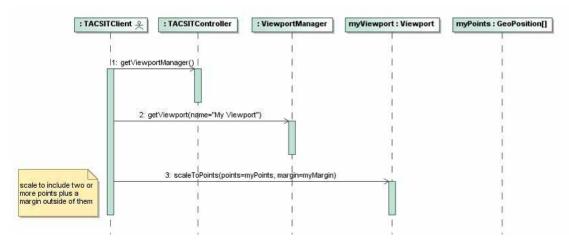


Get and set the current display center specified as geographic position.

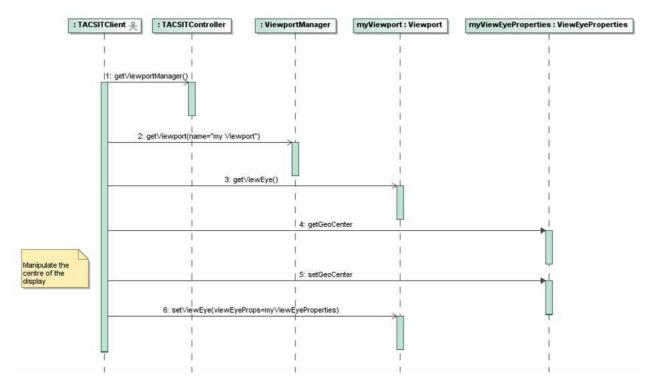


You can register listeners for changes in the TACSIT viewport extents including range scale, center.

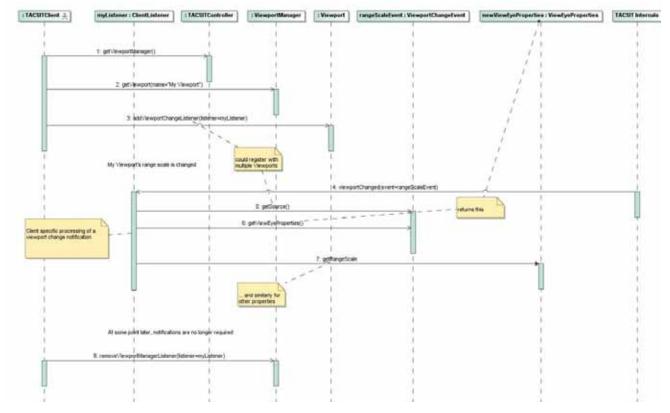

Set the center of the TACSIT display to an object. If your system requires the center to be consistently updated with the movement with a particular entity, you must periodically (based on your own timing and performance requirements) call these methods as required.

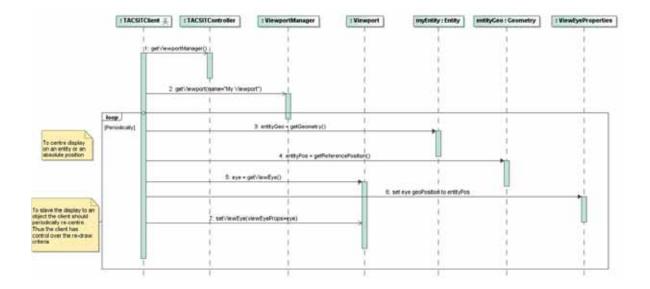

Get and set the geographic projection used for a particular Viewport. To get a list of available projections call the method in the TACSITController class. This provides a simple list of objects that give the names of the projections supported by the service. You may then use this object to set the projection desired in your viewport.

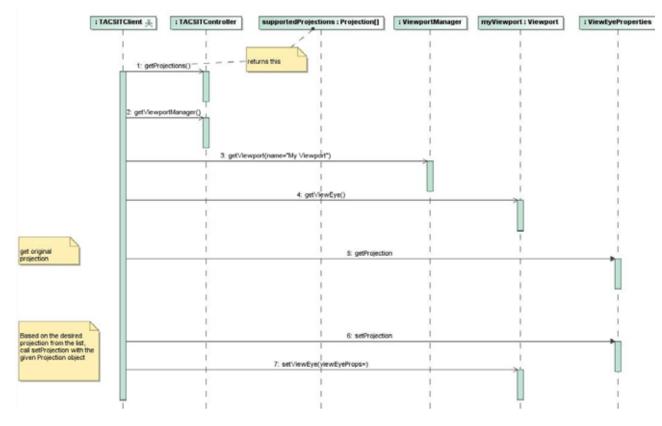

7.2.4 Class / Interface Specifications

The following provides a detailed description of the interface classes in the query package.

7.2.4.1 Interface Entity

The Entity class is an abstraction of the tactical objects that can be displayed on a Tactical Situation display (TacSit).

The Entity interface specifies the basic methods of interaction between the TACSIT system and the custom clients. Each application uses their own specific objects for Tracks, items of interest, etc. and they implement the Entity interface. While not specified in this specification, it is assumed that these types of Entity objects are the ones "added" by the application to the TACSIT to be visualized. Having this Entity interface allows both the TACSIT Controller implementation and the user-system to share tracks and other "real-world" objects.

Entities are modeled such that it is possible for clients to establish their own specific type and geometry and hence proceed to interact with them in an application specific manner.

Entities need to be able to indicate if they are still valid: even though they may have been part of a selection at a certain point in time, by the time that the entities of that selection are accessed the entities may not exist any more in reality.




Figure 7.4 - Entity

Name	Entity
Qualified Name	org::omg::tacsit::controller::Entity
Visibility	public
Base Classifier	

7.2.4.1.1 equals

Returns true if the given Entity corresponds to this Entity (i.e., the Tactical Objects are the same).

Туре	boolean
Visibility	public
Is Abstract	false
Parameter	in entity : Entity

7.2.4.1.2 getType

Returns the type of the Entity. This corresponds to the application specific class of the tactical object that has been added to the TacSit.

Туре	EntityType
Visibility	public
Is Abstract	false
Parameter	

7.2.4.1.3 isPointEntity

This is a convenience method for indicating whether the entity is to be handled as though it is a "single" point rather than a complex geometry. This is useful for containment and other queries.

Туре	boolean
Visibility	public
Is Abstract	false
Parameter	

Туре	boolean
Visibility	public
Is Abstract	false
Parameter	

Туре	boolean
Visibility	public
Is Abstract	false
Parameter	

7.2.4.1.4 isValid

Returns true if this instance is valid.

Туре	boolean
Visibility	public
Is Abstract	false
Parameter	

7.2.4.1.5 isValid

Returns the GeodeticPosition to be used as the main point of reference for this entity.

Туре	GeodeticPosition
Visibility	public
Is Abstract	false
Parameter	

7.2.4.2 Interface EntityType

An EntityType represents the type of an Entity that is handled by the Tacsit.

An EntityType is an implicit grouping of Entities according to their characteristics in reality (e.g., Track, Airfield, Country, etc.)



Figure 7.5 - Entity Type

Name	EntityType
Qualified Name	org::omg::tacsit::controller::EntityType
Visibility	public
Base Classifier	

7.2.4.3 getTypeName

Returns the display name of this EntityType.

Туре	String
Visibility	public
Is Abstract	false
Parameter	

7.2.4.4 Interface Projection

A projection is a method of mapping the curvi-linear 3D geometry of the Earth's surface to a 2D TACSIT Viewport (i.e., a Map Projection).

For the purpose of the Tacsit Controller interface projections are only needed to refer to by name.

Each "Toolkit" is free to provide whatever projections it supports. This interface provides the users access to the individually supported projections without having to specify or understand the details of how they are implemented. For projection details (such as projection parameters) toolkit specific provisions are foreseen.




Figure 7.6 - Projection

Name	Projection
Qualified Name	org::omg::tacsit::controller::Projection
Visibility	public
Base Classifier	

7.2.4.4.1 getName

Returns the name of this Projection.

Туре	String
Visibility	public
Is Abstract	false
Parameter	

7.2.4.5 Class SelectionEvent

SelectionEvent is the type of event that is passed to a SelectionListener each time there is a change in one of the selectionS of a SelectionManager.

SelectionEvent	
-source : SelectionManager -type : SelectionType -entities : Entity [0*]	
<pre>«getter»+getEntities() : Entity [0*] «getter»+getSelectionType() : SelectionType «getter»+getSource() : SelectionManager +SelectionEvent(entities : Entity [0*], source : SelectionManager, type : SelectionType)</pre>	

Figure 7.7 - SelectionEvent

Name	SelectionEvent
Qualified Name	org::omg::tacsit::controller::SelectionEvent
Visibility	public
Abstract	false
Base Classifier	
Realized Interface	

7.2.4.5.1 getEntities

Returns the list of entities involved in this selection event.

Туре	Entity
Visibility	public
Is Abstract	false
Parameter	

7.2.4.5.2 getSelectionType

Returns the type of selection that has changed.

Туре	SelectionType
Visibility	public
Is Abstract	false
Parameter	

7.2.4.5.3 getSource

Returns the SelectionManager in which the selection change occurred.

Туре	SelectionManager
Visibility	public
Is Abstract	false
Parameter	

7.2.4.5.4 SelectionEvent

A constructor to build and fill the attributes of the SelectionEvent.

Туре	Constructor
Visibility	public
Is Abstract	false
Parameter	• in entities : Entity [0*]
	inout source : SelectionManager
	inout type : SelectionType

7.2.4.6 Interface SelectionListener

SelectionListener is the type of object that is notified by a SelectionManager where it is registered in case of a change in one of the selections of that SelectionManager.

SelectionListener	\bigcirc
+selectionChanged(event : SelectionEvent) : voi	d

Figure 7.8 - SelectionListener

Name	SelectionListener
Qualified Name	org::omg::tacsit::controller::SelectionListener
Visibility	public
Base Classifier	

7.2.4.6.1 selectionChanged

This method is called by the SelectionManagers where this SelectionListener is registered in case a selection changed for that SelectionManager. The details of which selection changed and which elements are still in the selection can be obtained through the given SelectionEvent.

Туре	void
Visibility	public
Is Abstract	false
Parameter	• in event : SelectionEvent

7.2.4.7 Interface SelectionManager

The selection manager is the entry point for managing the selections of the Tacsit controller.

Multiple selections can be managed using the selection manager. Each selection has a specific selection type. Selection types are predefined. Each selection is managed as a list of the type Entity. Each element can only occur once in the selection and the order of the elements in the selection is not determined.

Managing a selection through the selection manager means that the selection manager allows retrieving and modifying each of the selections. It also allows users to register and unregister selection listeners that will be notified in case of a change in a selection.

The scope of the SelectionManager is determined by the SelectionMethodology of the Tacsit controller.




Figure 7.9 - SelectionManager

Name	SelectionManager
Qualified Name	org::omg::tacsit::controller::SelectionManager
Visibility	public
Base Classifier	

7.2.4.7.1 addSelectionListener

Registers the given SelectionListener to this SelectionManager.

After registration the SelectionListener will be notified through its only method each time that a change occurs in one of the selections managed by this SelectionManager. Registering a SelectionListener that was already registered with this SelectionManager therefore does not have any effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	• in listener : SelectionListener

7.2.4.7.2 addToSelection

Adds all elements of the given array of Entities to the selection of the given SelectionType of this SelectionManager. The given EntityList should not be empty.

After calling this method, getSelection (type) contains all elements of the given array of Entities as well as any entities previously selected for that type.

Each Entity can be part of only one selection at a time. Therefore, all entities of the given array of Entities that were part of a selection of another SelectionType than the given type are removed from those selections.

All SelectionListeners registered at the time of the addToSelection are notified by a call of their method selectionChanged.

Туре	void
Visibility	public
IsAbstract	false
Parameter	• in entities : Entity [*]
	• in type : SelectionType

7.2.4.7.3 clearAllSelections

Clears all selections of this SelectionManager.

After calling this method, the selection for any SelectionType contains no Entities.

All SelectionListeners registered at the time of the clearAllSelections are notified by a call of their method selectionChanged.

Туре	void
Visibility	public
IsAbstract	false
Parameter	

7.2.4.7.4 clearSelection

Clears the selection of the given SelectionType of this SelectionManager.

Afterwards the selection of the given SelectionType of this SelectionManager does not contain any Entities. All other selections of this SelectionManager are unchanged.

All SelectionListeners registered at the time of the clearSelection are notified by a call of their method selectionChanged.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in type : SelectionType

7.2.4.7.5 getSelection

Returns a list of selected Entities of the given SelectionType of this SelectionManager. Note that editing the returned EntitySet does not have an impact on the selection of the given SelectionType of this SelectionManager.

Туре	Entity
Visibility	public
IsAbstract	false
Parameter	in type : SelectionType

7.2.4.7.6 removeFromSelection

Removes all Entities in the given EntitySet from the selection to which they belong. Afterwards, these entities will not be contained in any selection until added (where contains is based on equals).

All SelectionListeners registered at the time of the removeFromSelection are notified by a call of their method selectionChanged for each SelectionType from which at least one Entity was removed.

Туре	Entity
Visibility	public
IsAbstract	false
Parameter	• in entities : Entity [*]

7.2.4.7.7 removeSelectionListener

Unregisters the given SelectionListener from this SelectionManager. Afterwards the SelectionListener will not be notified of changes in the selections of this SelectionManager.

Unregistering a SelectionListener that was not registered therefore does not have any effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	• in listener : SelectionListener

7.2.4.7.8 setSelection

Changes the selection of the given SelectionType to the given EntitySet. The given EntitySet should not be empty (see clearSelection and clearAllSelections). Afterwards the set of Entities of getSelection(type) equals the set of Entities of the given EntitySet.

All SelectionListeners registered at the time of the setSelection are notified by a call of their method selectionChanged.

Туре	void
Visibility	public
IsAbstract	false
Parameter	 in entities: Entity [*] in type : SelectionType

7.2.4.8 Interface TACSITController

This is the top level façade class for the Tactical Situation display (TACSIT) Controller API that enables clients to interact with SelectionManagers, Viewports, and Query TacSit content in terms of the Entity class.

The TacSit Controller API does not provide the mechanism for adding Entities to a TacSit. When a client receives an Entity from a Query, the client of the TacSit controller will interpret the Entity according to interfaces provided by other components than the Tacsit Controller (for instance an interaction with another component), which is known to have added the Entity to the TacSit by some other API.

[TacsitController
	+getProjections(): Projection [*]
	+getEntityTypes() +getViewportManager(): ViewportManager
	+getQueryManager(): QueryManager
	+getSelectionMethodology()
	+getSelectionManager(viewportName : String) : SelectionManager

Figure 7.10 - TacsitController

Name	TacsitController
Qualified Name	org::omg::tacsit::controller::TacsitController
Visibility	public
Base Classifier	

7.2.4.8.1 getProjections

Returns the projections that are supported by the TACSIT.

Attempted changes to the collection returned by this method will have no effect on the behavior and functionality of the TacsitController.

Туре	Projection
Visibility	public
IsAbstract	false
Parameter	

7.2.4.8.2 getEntityTypes

Returns the Entity Types that are supported by the TACSIT. This will return a list of all Entity Types available for Selection and Query by this TACSITController.

Attempted changes to the collection returned by this method will have no effect on the behavior and functionality of the TacsitController.

Туре	EntityType
Visibility	public
IsAbstract	false
Parameter	

7.2.4.8.3 getQueryManager

Returns the QueryManager for this Tacsit Controller.

Туре	QueryManager
Visibility	public
IsAbstract	false
Parameter	

7.2.4.8.4 getSelectionManager

Returns the SelectionManager that handles the selection on the viewport with name viewportName.

Depending on the SelectionMethodology of the Tacsit Controller the returned SelectionManagers for multiple viewports (different named viewports) will be identical or different. If the SelectionMethodology is ViewportDependent, then a different SelectionManager is returned for each individual viewport. If SelectionMethodology is ViewportIndependent, then one SelectionManager is used for all viewports, thus making selection "global" within the scope of this TACSITController.

Туре	SelectionManager
Visibility	public
IsAbstract	false
Parameter	in viewportName : String

7.2.4.8.5 getSelectionMethodology

Returns the SelectionMethodology of the Tacsit controller. If the SelectionMethodology is ViewportDependent, then each viewport is managed by its own SelectionManager. If SelectionMethodology is ViewportIndependent, then one SelectionManager is used for all viewports, thus making selection "global" within the scope of this TACSITController.

Туре	SelectionMethodology
Visibility	public
IsAbstract	false
Parameter	

7.2.4.8.6 getViewportManager

Returns the ViewportManager for this Tacsit Controller.

Туре	ViewportManager
Visibility	public
IsAbstract	false
Parameter	

7.2.4.9 Class ViewEyeProperties

ViewEyeProperties groups the attributes of a Viewport that have an impact on the position where Entities are displayed in the Viewport.

ViewEyeProperties	
-geoCenter : GeodeticPosition -rangeScale : Distance -orientation : Angle -projection : Projection	
<pre>«getter»+getRangeScale() : Distance «getter»+getOrientation() : Angle{q «getter»+getProjection() : Projection</pre>	ance): void

Figure 7.11 - ViewEyeProperties

Name	ViewEyeProperties
Qualified Name	org::omg::tacsit::controller::ViewEyeProperties
Visibility	public
Abstract	false
Base Classifier	
Realized Interface	

7.2.4.9.1 geoCenter

The geographic center of the Viewport. The geoCenter of the Viewport is the Geoposition that is displayed in the center of the Viewport (i.e., on a Viewport of w pixels wide and h pixels high, it is displayed on pixel (w/2, h/2)).

Туре	GeoPosition
Default Value	
Visibility	public
Multiplicity	1

7.2.4.9.2 orientation

The orientation of the Viewport.

The orientation is applied on the Viewport as an Angle rotation of the Viewport in clockwise direction around the Viewport's center. See the definition of Angle for precision guidance.

Туре	Angle
Default Value	
Visibility	public
Multiplicity	1

7.2.4.9.3 projection

The projection of the Viewport. The projection object here is assumed to be one of the Projections provided by the TACSIT Controller method "getProjections()." This specification does not address any further details of how to handle projections.

Туре	Projection
Default Value	
Visibility	public
Multiplicity	

7.2.4.9.4 rangeScale

The rangescale of the Viewport. The rangescale is the Distance from the center of the viewport to the nearest viewport edge.

Туре	Distance
Default Value	
Visibility	public
Multiplicity	1

7.2.4.9.5 getters/setters

Each of the attributes of the ViewEyeProperties class has an associated getter and setter method matching in name and type with the attribute. See the class image above for the signature for these methods.

7.2.4.10 Interface Viewport

The Viewport class enables a TacSit client to interact with the basic properties of a TacSit view. In particular the view's name, where it is centered, how it is scaled, projected, and oriented, and the selections it has (through its SelectionManager instance).

	Viewport
+getName(): String	1
+setViewEye(view	vEyeProps : ViewEyeProperties) : void
+getViewEye(): Vi	iewEyeProperties
+addViewportChar	ngeListener(listener:ViewportChangeListener):void
+removeViewport0	ChangeListener(listener: ViewportChangeListener): void
+setName(name :	String) : void
+convertScreenPo	sition(screenPos: ScreenPosition): GeodeticPosition
+convertGeoPositio	on(geoPos : GeodeticPosition) : ScreenPosition
+scaleToPoints(po	pints : GeodeticPosition [1*], margin : Distance) : void

Figure 7.12 - Viewport

Name	Viewport
Qualified Name	org::omg::tacsit::controller::Viewport

Visibility	public
Base Classifier	

7.2.4.10.1 addViewportChangeListener

Registers the given ViewportChangeListener to this Viewport. After registration the ViewportChangeListener will be notified through its only method each time that a viewport is changed. Registering a ViewportChangeListener that was already registered with this Viewport does not have any effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in listener : ViewportChangeListener

7.2.4.10.2 convertGeoPosition

Converts the given GeodeticPosition into a ScreenPosition (pixels). Note that the conversion will not be valid if the give position is not projectable to the screen, in that case an error condition is returned (specified by the PSM).

Туре	ScreenPosition
Visibility	public
IsAbstract	false
Parameter	in geoPos : GeodeticPosition

7.2.4.10.3 convertScreenPosition

Converts the passed screen position (pixels) into a geo position. Note that the conversion will not be valid if the give screen position is not projectable to the earth model, in that case an error condition is returned (specified by the PSM).

Туре	GeodeticPosition
Visibility	public
IsAbstract	false
Parameter	in screenPos : ScreenPosition

7.2.4.10.4 getName

Returns the name of the Viewport.

Туре	String
Visibility	public
IsAbstract	false
Parameter	

7.2.4.10.5 getViewEye

Returns a copy of the current ViewEyeProperties of the Viewport. Modification to the returned ViewEyeProperties object will have no effect on the Viewport. To effect change, call the setViewEye method with the desired properties.

Туре	ViewEyeProperties
Visibility	public
IsAbstract	false
Parameter	

7.2.4.10.6 removeViewportChangeListener

Unregisters the givenViewportChangeListener from this Viewport. Afterwards the ViewportChangeListener will not be notified of Viewport changes. Unregistering a ViewportChangeListener that was not registered does not have any effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in listener : ViewportChangeListener

7.2.4.10.7 scaleToPoints

Offset and scale the viewport to contain all points (as possible) passed in the given GeoPositions array. The margin Distance parameter specifies an additional space that needs to be visible around the broadest points in the points list.

Туре	void
Visibility	public
IsAbstract	false
Parameter	• in margin : Distance - if the margin value is negative, it is handled as 0.
	• in points : GeodeticPosition [1n]

7.2.4.10.8 setName

Set the name of the Viewport to the given name.

Туре	void
Visibility	public
IsAbstract	false
Parameter	• in name : String

7.2.4.10.9 setViewEye

Set the ViewEye properties of the Viewport to the given ViewEyeProperties. If any of the attributes of the given ViewEyeProperties object are not set, the current value of the Viewport for that attribute will not be affected.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in viewEyeProps : ViewEyeProperties

Later changes to the given ViewEyeProperties object do not have an effect on the Viewport.

7.2.4.11 ClassViewportChangeEvent

ViewportChangeEvent is the type of event that is passed to a ViewportChangeListener each time the Viewport changes. Through the ViewportChangeEvent it is possible to know which Viewport has been changed and details of the change.

If there are properties other than the view eye that the client is interested in, they can query the associated Viewport Object contained in the event available in the getSource() method.

ViewportChangeEvent	
+getViewEyeProperties() : ViewEyeProperties +getSource() : Viewport	

Figure 7.13 - ViewportChangeEvent

Name	ViewportChangeEvent
Qualified Name	org::omg::tacsit::controller::ViewportChangeEvent
Visibility	public
Abstract	true

7.2.4.11.1 getSource

Returns the Viewport that has changed associated with this event.

Туре	void
Visibility	public
IsAbstract	false
Parameter	

7.2.4.11.2 getViewEyeProperties

Returns a copy of the ViewEyeProperties of the Viewport that has changed.

Туре	ViewEyeProperties
Visibility	public
IsAbstract	false
Parameter	

7.2.4.12 Interface ViewportChangeListener

ViewportChangeListener is the type of object that is notified about a Viewport that it is registered for notification of changes.

ViewportChangeListener
+viewportChanged(event : ViewportChangeEvent) : void

Figure 7.14 - ViewportChangeListener

Name	ViewportChangeListener
Qualified Name	org::omg::tacsit::controller::ViewportChangeListener
Visibility	public
Base Classifier	

7.2.4.12.1 viewportChanged

This method is called by the Viewport where this ViewportChangeListener is registered in case a Viewport is changed. The details of the change can be obtained through the given ViewportChangeEvent.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in event : ViewportChangeEvent

7.2.4.13 Interface ViewportManager

The ViewportManager enables a TacSit client to manage Viewport instances and track changes to the set of Viewports. Construction of a Viewport is outside of the scope of this interface. Once Viewport objects are created they can be added to a manager via the addViewport method.

L. L	/iewportManager 🛛 🔿
	wport): void Viewport): void er(listener: ViewportManagerListener): void tener(listener: ViewportManagerListener): void

Figure 7.15 - ViewportManager

Name	ViewportManager
Qualified Name	org::omg::tacsit::controller::ViewportManager
Visibility	public
Base Classifier	

7.2.4.13.1 addViewport

Add a Viewport to this ViewportManager. If the Viewport is already added to the ViewportManager before, this operation has no effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in viewport : Viewport

7.2.4.13.2 addViewportManagerListener

Registers t he given ViewportManagerListener to this ViewportManager. After registration the ViewportManagerListener will be notified through each time that a viewport is added or removed through its corresponding method. Registering a ViewportManagerListener that was already registered with this ViewportManager does not have any effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in listener : ViewportManagerListener

7.2.4.13.3 getViewport

Returns the Viewport with the given name. If there is no such Viewport, an error condition is given. (specified by the PSM)

Туре	Viewport
Visibility	public
IsAbstract	false
Parameter	• in name : String

7.2.4.13.4 getViewports

Returns all Viewports managed by this ViewportManager. The collection returned by this method is unmodifiable.

Туре	Viewport[]
Visibility	public

IsAbstract	false
Parameter	

7.2.4.13.5 removeViewport

Remove the given Viewport from this ViewportManager. If the given Viewport is not managed by this ViewportManager, this operation as no effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in viewport : Viewport

7.2.4.13.6 removeViewportManagerListener

Unregisters the givenViewportManagerListener from this ViewportManager. Afterwards the ViewportManagerListener will not be notified of added or removed Viewports.

Unregistering a ViewportManagerListener that was not registered does not have any effect.

Туре	void
Visibility	public
IsAbstract	false
Parameter	• in listener : ViewportManagerListener

7.2.4.14 Interface ViewportManagerEvent

ViewportManagerEvent is the type of event that is passed to a ViewportManagerListener each time a Viewport is added or removed from the ViewportManager. Through the ViewportManagerEvent it is possible to know which Viewport has been added to which ViewportManager.

ViewportManagerEvent	0
+getViewport() : Viewport +getSource() : ViewportManager	

Figure 7.16 - ViewportManagerEvent

Name	ViewportManagerEvent
Qualified Name	org::omg::tacsit::controller::ViewportManagerEvent
Visibility	public
Base Classifier	

7.2.4.14.1 getSource

Returns the ViewportManager to which a Viewport has been added or removed.

Туре	ViewportManager
Visibility	public
IsAbstract	false
Parameter	

7.2.4.14.2 getViewport

Returns the viewport that has been added or removed by this event.

Туре	Viewport
Visibility	public
IsAbstract	false
Parameter	

7.2.4.15 InterfaceViewportManagerListener

ViewportManagerListener is the type of object that is notified by a ViewportManager where it is registered in case a Viewport is added or removed from that ViewportManager.



Figure 7.17 - ViewportManagerListener

Name	ViewportManagerListener
Qualified Name	org::omg::tacsit::controller::ViewportManagerListener
Visibility	public
Base Classifier	

7.2.4.15.1 viewportAdded

This method is called by the ViewportManager where this ViewportManagerListener is registered in case a Viewport is added.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in event : ViewportManagerEvent

The details of the addition can be obtained through the given ViewportManagerEvent.

7.2.4.15.2 viewportRemoved

This method is called by the ViewportManager where this ViewportManagerListener is registered in case a Viewport is removed.

The details of the removal can be obtained through the given ViewportManagerEvent.

Туре	void
Visibility	public
IsAbstract	false
Parameter	in event : ViewportManagerEvent

7.2.4.16 EnumerationSelectionMethodology

SelectionMethodology determines the scope of the SelectionManagers of the TACSIT Controller API.



Figure 7.18 - SelectionMethodology

Name	SelectionMethodology
Qualified Name	org::omg::tacsit::controller::SelectionMethodology
Visibility	public
Base Classifier	

If the SelectionMethodology is ViewportDependent each Viewport of the TacsitController has its own SelectionManager. Therefore the selection on one viewport does not depend on the selection on another viewport.

If SelectionMethodology is ViewportIndependent all Viewports of the TacsitController have a common SelectionManager. Therefore the selection on one viewport depends on the selection on another viewport: the selections on multiple viewports are identical.

7.2.4.17 EnumerationSelectionType

SelectionType allows distinguishing different kinds of selection in the Tacsit.



Figure 7.19 - SelectionType

Name	SelectionType
Qualified Name	org::omg::tacsit::controller::SelectionType
Visibility	public
Base Classifier	

The names of the instances are self explanatory.

7.3 Package org.omg.tacsit.query

The org.omg.tacsit.query package contains the interfaces for building queries about Entities that are used by the controller.

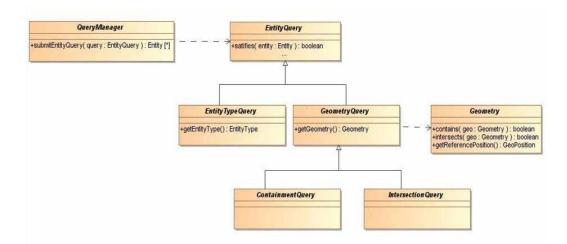


Figure 7.20 - Query Interfaces

The query interfaces are designed to provide maximum flexibility to the implementing system while still providing a useful API. The pattern for executing a query is to "build" a query using the appropriate EntityQuery objects (or its subclasses) and to submit that query to the QueryManager. The query manager will return the Entity objects that meet the query "satisfies" method. The basic EntityQuery is intended to provide an equals comparison on the entity object to "satisfy" the query. More specialized queries can be created by overriding the "satisfies" method. With these queries the client application can compare to any attribute in its system-specific Entity Object and query it from the TACSIT Controller.

7.3.1 Class / Interface Specifications

The following provides a detailed description of the interface classes in the query package.

7.3.1.1 Interface ContainmentQuery

Containment is determined by checking whether or not an entity's reference point (GeodeticPosition) is contained within a specific Geometry, i.e., this.satisfies(entity) = this.getGeometry().contains(entity.getReferencePoint()).



Figure 7.21 - ContainmentQuery

Name	ContainmentQuery
Qualified Name	org::omg::tacsit::controller::ContainmentQuery
Visibility	public
Base Classifier	• GeometryQuery

7.3.1.2 Interface EntityQuery

An EntityQuery encapsulates the criteria against which an Entity may be evaluated for membership.




Figure 7.22 - EntityQuery

Name	EntityQuery
Qualified Name	org::omg::tacsit::query::EntityQuery
Visibility	public
Base Classifier	

7.3.1.2.1 satisfies

Returns true if the specified Entity satisfies the criteria represented by this EntityQuery; false otherwise.

Туре	boolean
Visibility	public
IsAbstract	false
Parameter	• in event : Entity

7.3.1.3 Interface EntityTypeQuery

The EntityTypeQuery is used to determine whether or not a given Entity belongs to a particular EntityType.



Figure 7.23 - EntityTypeQuery

Name	EntityTypeQuery
Qualified Name	org::omg::tacsit::query::EntityTypeQuery
Visibility	public
Base Classifier	• EntityQuery

7.3.1.3.1 getEntityTypes

Returns the list of EntityType objects to compare with.

Туре	EntityType [1n]
Visibility	public
IsAbstract	false
Parameter	

7.3.1.4 Interface GeometryQuery

The GeometryQuery is used to determine whether or not a given Entity has a geometrical relationship with a particular Entity.



Figure 7.24 - GeometryQuery

Name	GeometryQuery	
Qualified Name	org::omg::tacsit::query::GeometryQuery	
Visibility	public	
Base Classifier	EntityQuery	

7.3.1.4.1 getGeometry

Returns the Geometry against which an Entity will be evaluated..

Туре	Geometry
Visibility	public
IsAbstract	false
Parameter	

7.3.1.5 Interface IntersectionQuery

The IntersectionQuery is used to determine if an Entity intersects geometrically with a Geometry. Intersection is determined by checking whether or not one entity partially overlaps another entity.



Figure 7.25 - IntersectionQuery

Name	IntersectionQuery	
Qualified Name	org::omg::tacsit::query::IntersectionQuery	
Visibility	public	
Base Classifier	• GeometryQuery	

7.3.1.6 InterfaceQueryManager

The QueryManager supports the execution of queries for entities against the TACSIT Controller.

Queries submitted through the QueryManager are transient in nature; that is, the results of a query represent the state of the TacSit Controller at the time the Query was executed. Query results will not be maintained by the QueryManager as the state of the TacSit Controller changes. Since the QueryManager treats the Query objects as stateless, the same Query may be re-used for any number of subsequent submissions.

In the case where a null query is passed to the QueryManager, the QueryManager is to return all Entities in the QueryManager.



Figure 7.26 - QueryManager

Name	QueryManager
Qualified Name	org::omg::tacsit::query::QueryManager
Visibility	public
Base Classifier	

7.3.1.6.1 submitEntityQuery

Returns the set of all Entities that satisfy the criteria expressed in the given EntityQuery..

Туре	Entity
Visibility	public
IsAbstract	false
Parameter	• in query : EntityQuery

7.4 Package org.omg.tacsit.geometry

The org.omg.tacsit.geometry package contains the interfaces for describing the location and bounds of regions of interest to the TACSIT Controller API.

Centered •getCenter() Geod	and the second sec	Geodetic -pril, inglu +pril, attude	dec) Ange	4 - 4		
		+ptAthuis	() Ditiance		Bistance	

Figure 7.27 - Query Interfaces

The interfaces described here are the minimal subset of possible geometries for interating with the TACSIT.

7.4.1 Class / Interface Specifications

The following provides a detailed description of the interface classes in the query package.

7.4.1.1 Interface Geometry

Geometry is the base class for all representations of geometric shapes. Every Geometry must be able to evaluate containment and intersection criteria between itself and any other Geometry. For non-closed Geometries, or for Geometries with edges that cross, it is up to those Geometries to define containment of a specified point within that Geometry.

This OMG specification is consistent with the OGC "OpenGIS® Implementation Specification for Geographic information - Simple feature access - Part 1: Common architecture" (Doc: OGC 06-103r3; Version: 1.2.0; Date: 2006-10-05) in that this OMG specification does not contradict the OGC specification and uses the same names for types and methods where possible.

This OMG Specification does not require a Geometry to completely implement the OGC specification.




Figure 7.28 - Geometry

Name	Geometry
Qualified Name	org::omg::tacsit::geometry::Geometry

Visibility	public
Base Classifier	Cloneable
	• Serializable

7.4.1.1.1 contains

Returns TRUE if the passed GeodeticPosition object "point" projected on the surface of the Earth is contained within this Geometry object.

Туре	boolean	
Visibility	public	
IsAbstract	false	
Parameter	in geo : GeodeticPoint	

7.4.1.2 Interface GeodeticPosition

GeoPosition represent a geographical location i.e., a position on the earth.




Figure 7.29 - GeodeticPosition

Name	GeodeticPosition
Qualified Name	org::omg::tacsit::geometry::GeodeticPosition
Visibility	public
Base Classifier	• Geometry

7.4.1.2.1 getLatitude

Returns the latitude in Radians.

Туре	double
Visibility	public
IsAbstract	true
Parameter	

7.4.1.2.2 getLongitude

Returns the longitude in Radians.

Туре	double
Visibility	public
IsAbstract	true
Parameter	none

7.4.1.2.3 getAltitude

Returns the altitude in meters or {Double.NAN} if the altitude is not valid.

Туре	Distance
Visibility	public
IsAbstract	true
Parameter	none

7.4.1.3 Class ScreenPosition

ScreenPosition is a simple class to encapsulate a point location on the screen.

-x : int
-y : int

Figure 7.30 - ScreenPosition

Name	ScreenPosition
Qualified Name	org.omg.tacsit.geometry.coordinate::ScreenPosition
Visibility	public
Abstract	false

7.4.1.3.1 x

The x position of the point.

Туре	int
Default Value	
Visibility	public
Multiplicity	1

7.4.1.3.2 y

The y position of the point.

Туре	int
Default Value	
Visibility	public
Multiplicity	1

7.4.1.4 Interface Centered

Centered is a simple class to designate that a particular Geometry object is centred at a certain GeodeticPosition.



Figure 7.31 - Centered

Name	Centered
Qualified Name	org::omg::tacsit::geometry::Centered
Visibility	public
Base Classifier	

7.4.1.4.1 getCenter()


Returns the center of the geometry.

Туре	GeodeticPosition
Visibility	public
IsAbstract	true
Parameter	none

7.4.1.5 Interface Circle

Circle is a simple centred circular geometry with a radius measured in meters.





Name	Circle
Qualified Name	org::omg::geometry::Circle
Visibility	public
Base Classifier	• Centered
	• Geometry

7.4.1.5.1 getRadius()

Returns the radius of the circle in meters.

Туре	double
Visibility	public
IsAbstract	false
Parameter	

7.4.1.6 Rectangle

Rectangle is a simple centred geometry with a width and height measured in meters. An orientation is provided to skew the rectangle as necessary.



Figure 7.33 - Rectangle

Name	Rectangle
Qualified Name	org::omg::tacsit::geometry::Rectangle
Visibility	public
Base Classifier	• Centered
	• Geometry

7.4.1.6.1 getHeight

Returns the height of the rectangular shape in meters.

Туре	Distance
Visibility	public

IsAbstract	false
Parameter	

7.4.1.6.2 getOrientation

Returns the azimuth of the y axis of the rectangle shape, where zero is north in radians.

Туре	Angle
Visibility	public
IsAbstract	false
Parameter	

7.4.1.6.3 getWidth

Returns the width of the rectangle shape in meters.

Туре	double
Visibility	public
IsAbstract	false
Parameter	

7.4.1.7 Interface Angle

The angular distance between two intersecting lines. Angle objects are immutable. All methods that operate on the state of the Angle do not modify its value.



Figure 7.34 - Angle

Name	Angle
Qualified Name	org: :omg: :tacsit: :geometry: :Angle
Base Classifier	

7.4.1.7.1 getDegrees

Returns the angular distance in degrees.

Туре	double
IsAbstract	false
Parameter	

7.4.1.7.2 getRadians

Returns the angular distance in radians.

Туре	double
Visibility	public
IsAbstract	false
Parameter	

7.4.1.7.3 add

Returns a new Angle which represents the sum of this angular distance and the parameter (this + that). Neither this Angle nor the parameter are modified.

Туре	Angle
Visibility	Public
IsAbstract	False
Parameter	• in angle : Angle

7.4.1.7.4 subtract

Returns a new Angle which represents the difference of this angular distance and the parameter (this - that). Neither this angle nor the parameter are modified.

Туре	Angle
Visibility	Public
IsAbstract	False
Parameter	• in angle : Angle

Interface Distance

A representation of the space between two points. Distance objects are immutable. All methods that operate on the state of the Distance do not modify its value.

Distance
+getFeet(): double
+getYards(): double
+getMiles(): double
+getMeters(): double
+getKilometers(): double
+getNauticalMiles(): double
+add(distance : Distance) : Distance
+subtract(distance : Distance) : Distance
+multipliedBy(scalarValue : double) : Distance
+dividedBy(scalarValue : double) : Distance
+dividedBy(distance : Distance) : double

Figure 7.35 - Distance

Name	Distance
Qualified Name	org: :omg: :tacsit: :geometry: :Distance
Visibility	public
Base Classifier	

7.4.1.7.5 getFeet

Gets the value of this Distance, as expressed in feet.

Туре	double
Visibility	public
IsAbstract	false
Parameter	

7.4.1.7.6 getYards

Gets the value of this Distance, as expressed in yards.

Туре	double
Visibility	public
IsAbstract	false
Parameter	

7.4.1.7.7 getMiles

Gets the value of this Distance, as expressed in miles.

Туре	double
Visibility	Public
IsAbstract	False
Parameter	

7.4.1.7.8 getMeters

Gets the value of this Distance, as expressed in meters.

Туре	double
Visibility	Public
IsAbstract	False
Parameter	

7.4.1.7.9 getKilometers

Gets the value of this Distance, as expressed in kilometers.

Туре	double
Visibility	Public
IsAbstract	False
Parameter	

7.4.1.7.10 getNauticalMiles

Gets the value of this Distance, as expressed in nautical miles.

Туре	double
Visibility	Public
IsAbstract	False
Parameter	

7.4.1.7.11 add

Creates a new Distance which represents the sum of this Distance and the parameter (this + that). Neither this distance nor the parameter are modified.

Туре	Distance
Visibility	Public
IsAbstract	False
Parameter	• in distance : Distance

7.4.1.7.12 subtract

Creates a new distance which represents the difference of this Distance and the parameter (this - that). Neither this Distance nor the parameter are modified.

Туре	Distance
Visibility	Public

IsAbstract	False
Parameter	• in distance : Distance

7.4.1.7.13 multipliedBy

Creates a new which represents this Distance times a scalar value (this * scalarValue). This Distance is not modified.

A typical usage of this would be in a formula that requires a Distance; for instance, the circumference of a circle = 2 * Pi * radius. In this case, the radius is a Distance, the scalar value being multiplied is (2 * Pi), and the return value is the circumference.

Note: No option is given to multiplyBy(Distance), because the logical result of such a function would be an Area value, not a Distance.

Туре	Distance
Visibility	Public
IsAbstract	False
Parameter	• in scalarValue : double

7.4.1.7.14 dividedBy

Creates a new Distance which represents this Distance divided by a scalar value (this / scalarValue). This Distance is not modified.

A typical usage of this would be in a formula that requires a Distance; for instance, the computing half the distance traveled. In this case, the total distance is a Distance, the scalar value being divided is 2, and the return value is the half the total distance.

Туре	Distance
Visibility	Public
IsAbstract	False
Parameter	• in scalarValue : double

7.4.1.7.15 dividedBy

Calculates a scalar value that represents this Distance by another distance (this / that). This Distance is not modified.

Note: When dividing a unit of measurement by the same unit of measurement, the units cancel each other out, and the resulting value is scalar.

Туре	double
Visibility	Public
IsAbstract	False
Parameter	• in distance : Distance

8 Java Platform Specific Model

A Java PSM is provided separately (see c4i/2010-08-03). The PSM contains a Java-specialized UML Model, and sample Java classfiles of the requisite classes.

Note that in the Java PSM, the ScreenPosition class is replaced by the standard Java representation of a screen position (java.awt.Point). This is noted in the Java UML Model.

Additionally, instead of using array types for parameters and return types with multiple values, a templated version of the standard Java Collection Object (List) java.util.List<NecessaryType> has been used.

9 C++ Platform Specific Model

A C++ PSM is provided separately (see c4i/2010-08-04). The PSM contains a sample C++ header files of the requisite classes.